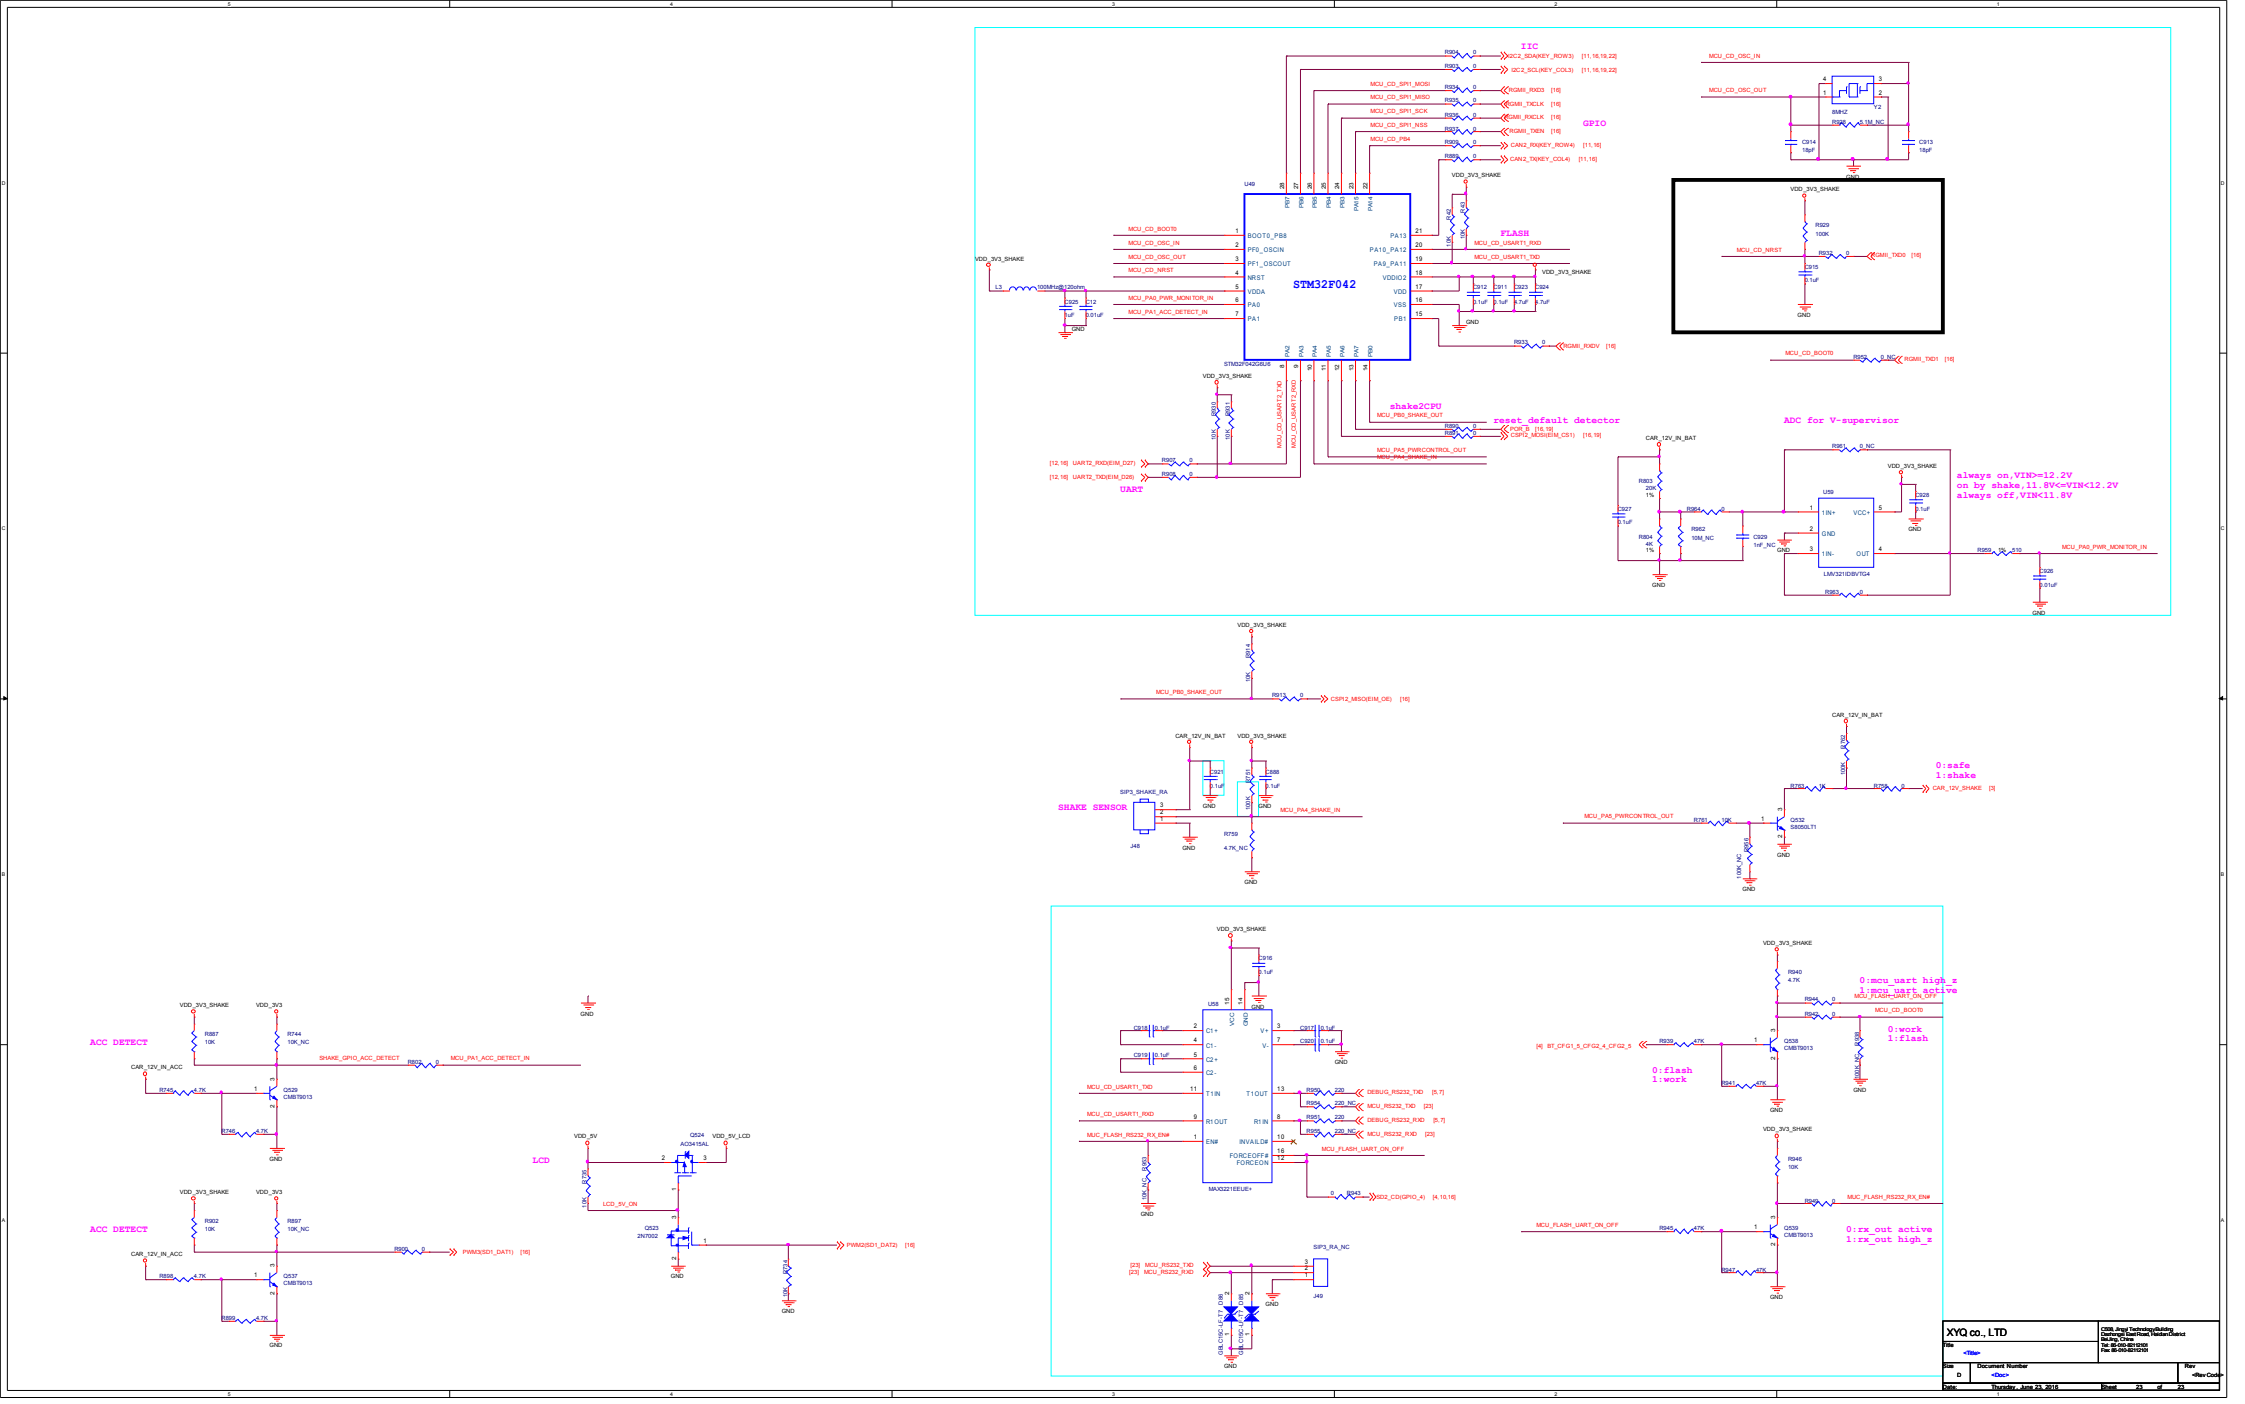
IIC
GPIO
FLASH
shake2CPU
reset_default detector
UART
ADC for V-supervisor
always on,VIN>=12.2V
on by shake,11.8V<=VIN<12.2V
always off,VIN<11.8V
STM32F042
SHAKE SENSOR
0:safe
1:shake
ACC DETECT
ACC DETECT
LCD
0:mcu_uart high_z
1:mcu_uart active
0:work
1:flash
0:flash
1:work
0:rx_out active
1:rx_out high_z
XYQ co., LTD
Title
<Title>
Size
D
Document Number
<Doc>
Rev
<Rev Code>
Date:
Thursday, June 23, 2016
Sheet
23
of
23