

# Android™ User's Guide

## Contents

## 1 Overview

This document describes how to build Android Pie 9.0 platform for the i.MX 8 series devices. It provides instructions for:

- Configuring a Linux® OS build machine.
- Downloading, patching, and building the software components that create the Android™ system image.
- Building from sources and using pre-built images.
- Copying the images to boot media.
- Hardware/software configurations for programming the boot media and running the images.

For more information about building the Android platform, see [source.android.com/source/building.html](http://source.android.com/source/building.html).

1	Overview.....	1
2	Preparation.....	1
3	Building the Android platform for i.MX.....	2
4	Running the Android Platform with a Prebuilt Image.....	7
5	Programming Images.....	11
6	Bootting.....	14
7	Over-The-Air (OTA) Update.....	20
8	Customized Configuration.....	24
9	Revision History.....	32

## 2 Preparation

### 2.1 Setting up your computer

To build the Android source files, use a computer running the Linux OS. The Ubuntu 16.04 64-bit version and openjdk-8-jdk is the most tested environment for the Android Pie 9.0 build.



## Building the Android platform for i.MX

After installing the computer running Linux OS, check whether all the necessary packages are installed for an Android build. See "Setting up your machine" on the Android website [source.android.com/source/initializing.html](http://source.android.com/source/initializing.html).

In addition to the packages requested on the Android website, the following packages are also needed:

```
$ sudo apt-get install uuid uuid-dev
$ sudo apt-get install zlib1g-dev liblz-dev
$ sudo apt-get install liblz2-2 liblz2-dev
$ sudo apt-get install lzop
$ sudo apt-get install git-core curl
$ sudo apt-get install u-boot-tools
$ sudo apt-get install mtd-utils
$ sudo apt-get install android-tools-fsutils
$ sudo apt-get install openjdk-8-jdk
$ sudo apt-get install device-tree-compiler
$ sudo apt-get install gdisk
$ sudo apt-get install m4
$ sudo apt-get install libz-dev
```

### NOTE

If you have trouble installing the JDK in Ubuntu, see [How to install misc JDK in Ubuntu for Android build](#).

Configure git before use. Set the name and email as follows:

- `git config --global user.name "First Last"`
- `git config --global user.email "first.last@company.com"`

## 2.2 Unpacking the Android release package

After you have set up a computer running Linux OS, unpack the Android release package by using the following commands:

```
$ cd ~ (or any other directory you like)
$ tar xzvf imx-p9.0.0_2.3.0.tar.gz
```

## 3 Building the Android platform for i.MX

### 3.1 Getting i.MX Android release source code

The i.MX Android release source code consists of three parts:

- NXP i.MX public source code, which is maintained in the [CodeAurora Forum repository](#).
- AOSP Android public source code, which is maintained in [android.googlesource.com](http://android.googlesource.com).
- NXP i.MX Android proprietary source code package, which is maintained in [www.NXP.com](http://www.NXP.com).

Assume you had i.MX Android proprietary source code package `imx-p9.0.0_2.3.0.tar.gz` under `~/.` directory. To generate the i.MX Android release source code build environment, execute the following commands:

```
$ mkdir ~/bin
$ curl https://storage.googleapis.com/git-repo-downloads/repo > ~/bin/repo
$ chmod a+x ~/bin/repo
$ export PATH=${PATH}:~/bin
$ source ~/imx-p9.0.0_2.3.0/imx_android_setup.sh
# By default, the imx_android_setup.sh script will create the source code build environment
in the folder ~/android_build
# {MY_ANDROID} will be referred as the i.MX Android source code root directory in all i.MX
Android release documentation.
$ export MY_ANDROID=~/android_build
```

## 3.2 Building Android images

Building the Android image is performed when the source code has been downloaded (Section 3.1 "[Getting i.MX Android release source code](#)").

Commands **lunch** <buildName-buildType> to set up the build configuration and **make** to start the build process are executed.

The build configuration command **lunch** can be issued with an argument <Build name>-<Build type> string, such as **lunch evk\_8mm-userdebug**, or can be issued without the argument, which will present a menu of options to select.

The Build Name is the Android device name found in the directory `${MY_ANDROID}/device/fsl/`. The following table lists the i.MX build names.

**Table 1. Build names**

Build name	Description
evk_8mm	i.MX 8M Mini EVK Board
aiy_8mq	i.MX 8M Quad AIY Board
evk_8mn	i.MX 8M Nano EVK Board
mek_8q	i.MX 8QuadXPlus MEK Board

The build type is used to specify what debug options are provided in the final image. The following table lists the build types.

**Table 2. Build types**

Build type	Description
user	Production-ready image, no debug
userdebug	Provides image with root access and debug, similar to "user"
eng	Development image with debug tools

Android build steps are as follows:

1. Change to the top level build directory.

```
$ cd ${MY_ANDROID}
```

2. Set up the environment for building. This only configures the current terminal.

```
$ source build/envsetup.sh
```

3. Execute the Android **lunch** command. In this example, the setup is for the production image of i.MX 8M Mini EVK Board/Platform device with userdebug type.

```
$ lunch evk_8mm-userdebug
```

4. Execute the **make** command to generate the image.

```
$ make 2>&1 | tee build-log.txt
```

When the **make** command is complete, the build-log.txt file contains the execution output. Check for any errors.

For BUILD\_ID & BUILD\_NUMBER changing, update build\_id.mk in your `${MY_ANDROID}` directory. For details, see the [Android™ Frequently Asked Questions](#).

The following outputs are generated by default in `${MY_ANDROID}/out/target/product/evk_8mm`:

## Building the Android platform for i.MX

- root/: root file system (including init, init.rc). Mounted at /.
- system/: Android system binary/libraries. Mounted at /system.
- data/: Android data area. Mounted at /data.
- recovery/: root file system when booting in "recovery" mode. Not used directly.
- dtbo-imx8mm.img: Board's device tree binary. It is used to support MIPI-to-HDMI output.
- dtbo-imx8mm-m4.img: Board's device tree binary. It is used to support MIPI-to-HDMI output and audio playback based on Cortex-M4 freeRTOS.
- dtbo-imx8mm-mipi-panel: Board's device tree binary. It is used to support MIPI panel output.
- vbmeta-imx8mm.img: Android Verify boot metadata image for boot-imx8mm.img.
- vbmeta-imx8mm-m4.img: Android Verify boot metadata image for boot-imx8mm-m4.img.
- vbmeta-imx8mm-mipi-panel.img: Android Verify boot metadata image for boot-imx8mm-mipi-panel.img.
- ramdisk.img: Ramdisk image generated from "root/". Not directly used.
- system.img: EXT4 image generated from "system/". Can be programmed to "SYSTEM" partition on SD/eMMC card with "dd".
- partition-table.img: GPT partition table image. Used for 16 GB SD card and eMMC card.
- partition-table-7GB.img: GPT partition table image. Used for 8 GB SD card.
- partition-table-28GB.img: GPT partition table image. Used for 32 GB SD card.
- u-boot-imx8mm.imx: U-Boot image without Trusty OS integrated into it for i.MX 8M Mini EVK with LPDDR4.
- u-boot-imx8mm-trusty.imx: U-Boot image with Trusty OS integrated into it for i.MX 8M Mini EVK with LPDDR4
- u-boot-imx8mm-evk-uuu.imx: U-Boot image used by UUU for i.MX 8M Mini EVK with LPDDR4. It is not flashed to MMC.
- u-boot-imx8mm-ddr4.imx: U-Boot image without Trusty OS integrated into it for i.MX 8M Mini EVK with DDR4.
- u-boot-imx8mm-ddr4-evk-uuu.imx: U-Boot image used by UUU for i.MX 8M Mini EVK with DDR4. It is not flashed to MMC.
- imx8mm\_mcu\_demo.img: MCU FreeRTOS image to support audio playback on MCU side.
- vendor.img: vendor image, which holds platform binaries. Mounted at /vendor.
- boot.img: a composite image that includes the kernel Image, ramdisk, and boot parameters.
- rpmb\_key\_test.bin: prebuilt test RPMB key. Can be used to set the RPMB key as fixed 32 bytes 0x00.
- testkey\_public\_rsa4096.bin: prebuilt AVB public key. It is extracted from the default AVB private key.

### NOTE

- To build the U-Boot image separately, see [Building U-Boot images](#).
- To build the kernel uImage separately, see [Building a kernel image](#).
- To build boot.img, see [Building boot.img](#).
- To build dtbo.img, see [Building dtbo.img](#).

## 3.2.1 Configuration examples of building i.MX devices

The following table shows examples of using the `lunch` command to set up different i.MX devices. After the desired i.MX device is set up, the `make` command is used to start the build.

**Table 3. i.MX device lunch examples**

Build name	Description
i.MX 8M Mini EVK board	\$ lunch evk_8mm-userdebug
i.MX 8M Quad AIY board	\$ lunch aiy_8mq-userdebug
i.MX 8M Nano EVK Board	\$ lunch evk_8mn-userdebug
i.MX 8QuadXPlus MEK board	\$ lunch mek_8q-userdebug

## 3.2.2 Build mode selection

There are three types of build mode to select: eng, user, and userdebug.

### NOTE

To pass CTS, use **user** build mode.

The userdebug build behaves the same as the user build, with the ability to enable additional debugging that normally violates the security model of the platform. This makes the userdebug build with greater diagnosis capabilities for user test.

The eng build prioritizes engineering productivity for engineers who work on the platform. The eng build turns off various optimizations used to provide a good user experience. Otherwise, the eng build behaves similar to the user and userdebug builds, so that device developers can see how the code behaves in those environments.

In a module definition, the module can specify tags with LOCAL\_MODULE\_TAGS, which can be one or more values of optional (default), debug, eng.

If a module does not specify a tag (by LOCAL\_MODULE\_TAGS), its tag defaults to optional. An optional module is installed only if it is required by product configuration with PRODUCT\_PACKAGES.

The main differences among the three modes are listed as follows:

- eng: development configuration with additional debugging tools
  - Installs modules tagged with: eng and/or debug.
  - Installs modules according to the product definition files, in addition to tagged modules.
  - ro.secure=0
  - ro.debuggable=1
  - ro.kernel.android.checkjni=1
  - adb is enabled by default.
- user: limited access; suited for production
  - Installs modules tagged with user.
  - Installs modules according to the product definition files, in addition to tagged modules.
  - ro.secure=1
  - ro.debuggable=0
  - adb is disabled by default.
- userdebug: like user but with root access and debuggability; preferred for debugging
  - Installs modules tagged with debug.
  - ro.debuggable=1
  - adb is enabled by default.

There are two methods for the build of Android image.

Method 1: Set the environment first and then issue the make command:

```
$ cd ${MY_ANDROID}
$ source build/envsetup.sh #set env
$ make -j4 PRODUCT-XXX userdebug 2>&1 | tee build-log.txt #XXX depends on different boards.
See the table below.
```

**Table 4. Android system image production build method 1**

i.MX development tool	Description	Image build command
Evaluation Kit	i.MX 8M Mini EVK	\$ make -j4 PRODUCT-evk_8mm-userdebug
AIY	i.MX 8M Quad AIY	\$ make -j4 PRODUCT-aiy_8mq-userdebug
Evaluation Kit	i.MX 8M Nano EVK	\$ make -j4 PRODUCT-evk_8mn-userdebug
Evaluation Kit	i.MX 8QuadXPlus MEK	\$ make -j4 PRODUCT-mek_8q-userdebug

Method 2: Set the environment and then use lunch command to configure argument. See table below. An example for the i.MX 8M Mini EVK board is as follows:

## Building the Android platform for i.MX

```
$ cd ${MY_ANDROID}
$ source build/envsetup.sh
$ lunch evk_8mm-userdebug
$ make -j4
```

**Table 5. Android system image production build method 2**

i.MX development tool	Description	Lunch configuration
Evaluation Kit	i.MX 8M Mini EVK	evk_8mm-userdebug
AIY	i.MX 8M Quad AIY	aiy_8mq-userdebug
Evaluation Kit	i.MX 8M Nano EVK	evk_8mn-userdebug
Evaluation Kit	i.MX 8QuadXPlus MEK	mek_8q-userdebug

For more Android platform building information, see [source.android.com/source/building.html](http://source.android.com/source/building.html).

### 3.2.3 Building with GMS package

Get the Google Mobile Services (GMS) package from Google. Put the GMS package into `${MY_ANDROID}/vendor/partner_gms` folder. Make sure that the `product.mk`\* file includes the following line:

```
$(call inherit-product-if-exists, vendor/partner_gms/products/gms.mk)
```

Then build the images. The GMS package is installed into the target images.

#### NOTE

`product.mk` indicates the build target make file. For example, for i.MX 8M Mini EVK Board, the `product.mk` is named `device/fsl/imx8m/evk_8mm/evk_8mm.mk`.

## 3.3 Building U-Boot images

Use the following command to generate `u-boot.imx` under the Android environment:

```
# U-Boot image for i.MX 8M Mini board
$ cd ${MY_ANDROID}
$ source build/envsetup.sh
$ lunch evk_8mm-userdebug
$ make bootloader -j4
```

For other platforms, use `lunch <buildName-buildType>` to set up the build configuration. For detailed build configuration, see Section 3.2 "Building Android images".

## 3.4 Building a kernel image

Kernel image is automatically built when building the Android root file system.

The following are the default Android build commands to build the kernel image:

```
$ cd ${MY_ANDROID}/vendor/nxp-opensource/kernel-imx
$ echo $ARCH && echo $CROSS_COMPILE
```

Make sure that you have those two environment variables set. If the two variables are not set, set them as follows:

```

$ export ARCH=arm64
$ export CROSS_COMPILE=${MY_ANDROID}/prebuilts/gcc/linux-x86/aarch64/aarch64-linux-
android-4.9/bin/aarch64-linux-android-

# Generate ".config" according to default config file under arch/arm64/configs/
android_defconfig.
# to build the kernel Image for i.MX 8M Mini, i.MX 8M Quad AIY, i.MX 8M Nano EVK, and i.MX
8QuadXPlus MEK
$ make android_defconfig
$ make KCFLAGS=-mno-android

```

The kernel images are found in `${MY_ANDROID}/out/target/product/evk_8mm/obj/KERNEL_OBJ/arch/arm64/boot/` Image.

### 3.5 Building boot.img

boot.img and boota are default booting commands.

As outlined in [Running the Android Platform with a Prebuilt Image](#), we use boot.img and boota as default commands to boot instead of the uramdisk and Image we used before.

Use this command to generate boot.img under Android environment:

```

# Boot image for i.MX 8M Mini EVK board
$ source build/envsetup.sh
$ lunch evk_8mm-userdebug
$ make bootimage -j4

```

For other platforms, use `lunch <buildName-buildType>` to set up the build configuration. For detailed build configuration, see Section 3.2 "Building Android images".

### 3.6 Building dtbo.img

Dtbo image holds the device tree binary of the board.

To generate dtbo.img under the Android environment, use the following commands:

```

# dtbo image for i.MX 8M Mini board
$ source build/envsetup.sh
$ lunch evk_8mm-userdebug
$ make dtboimage -j4

```

For other platforms, use `lunch <buildName-buildType>` to set up the build configuration. For detailed build configuration, see Section 3.2 "Building Android images".

## 4 Running the Android Platform with a Prebuilt Image

To test the Android platform before building any code, use the prebuilt images from the following packages and go to "Programming Images" and "Boot".

**Table 6. Image packages**

Image package	Description
android_p9.0.0_2.3.0_image_8mmevk.tar.gz	Prebuilt image for i.MX 8M Mini EVK board, which includes NXP extended features.

*Table continues on the next page...*

**Table 6. Image packages (continued)**

android_p9.0.0_2.3.0_image_8mqaiy.tar.gz	Prebuilt image for i.MX 8M Quad AIY board, which includes NXP extended features.
android_p9.0.0_2.3.0_image_8mnevk.tar.gz	Prebuilt image for i.MX 8M Nano EVK board, which includes NXP extended features.
android_p9.0.0_2.3.0_image_8qmek.tar.gz	Prebuilt image for i.MX 8QuadXPlus MEK board, which includes NXP extended features.

The following tables list the detailed contents of android\_p9.0.0\_2.3.0\_image\_8mmevk.tar.gz image package.

The table below shows the prebuilt images to support the system on i.MX 8M Mini boards.

**Table 7. Images for i.MX 8M Mini**

<b>i.MX 8M Mini image</b>	<b>Description</b>
u-boot-imx8mm.imx	Bootloader without Trusty OS integrated into it for i.MX 8M Mini board with LPDDR4.
u-boot-imx8mm-trusty.imx	Bootloader with Trusty OS integrated into it for i.MX 8M Mini board with LPDDR4.
u-boot-imx8mm-ddr4.imx	Bootloader without Trusty OS for i.MX 8M Mini board with DDR4.
u-boot-imx8mm-evk-uuu.imx	Bootloader used by UUU for i.MX 8M Mini board with LPDDR4. It is not flashed to MMC.
u-boot-imx8mm-ddr4-evk-uuu.imx	Bootloader used by UUU for i.MX 8M Mini board with DDR4. It is not flashed to MMC.
boot.img	Boot image for i.MX 8M Mini board.
system.img	System Boot image for i.MX 8M Mini board.
vendor.img	Vendor image for i.MX 8M Mini board.
partition-table.img	GPT table image for 16 GB SD card and eMMC
partition-table-7GB.img	GPT table image for 8 GB SD card.
partition-table-28GB.img	GPT table image for 32 GB SD card.
imx8mm_mcu_demo.img	Cortex-M4 FreeRTOS image for i.MX 8M Mini board.
dtbo-imx8mm.img	Device Tree image for i.MX 8M Mini board to support LPDDR4, MIPI-to-HDMI output, and DSD audio playback.
dtbo-imx8mm-ddr4.img	Device Tree Image for i.MX 8M Mini board to support DDR4 and MIPI-to-HDMI output.
dtbo-imx8mm-m4.img	Device Tree image for i.MX 8M Mini board to support LPDDR4, MIPI-to-HDMI output, and audio playback based on Cortex-M4 FreeRTOS.
dtbo-imx8mm-mipi-panel.img	Device Tree Image for i.MX 8M Mini board to support LPDDR4 and MIPI panel output.
vbmeta-imx8mm.img	Android Verify Boot metadata Image for i.MX 8M Mini EVK board to support LPDDR4 and MIPI-to-HDMI output.
vbmeta-imx8mm-ddr4.img	Android Verify Boot metadata Image for i.MX 8M Mini board to support DDR4 and MIPI-to-HDMI output.
vbmeta-imx8mm-m4.img	Android Verify Boot metadata image for i.MX 8M Mini board to support LPDDR4, MIPI-to-HDMI output, and Cortex-M4 playback.

*Table continues on the next page...*



**Table 7. Images for i.MX 8M Mini (continued)**

vbmata-imx8mm-mipi-panel.img	Android Verify Boot metadata image for i.MX 8M Mini board to support LPDDR4 and MIPI panel output.
rpmb_key_test.bin	Prebuilt test RPMB key, which can be used to set the RPMB key as fixed 32 bytes 0x00.
testkey_public_rsa4096.bin	Prebuilt AVB public key, which is extracted from the default AVB private key.

The following tables list the detailed contents of android\_p9.0.0\_2.3.0\_image\_8mqaiy.tar.gz image package.

The table below shows the prebuilt images to support the system on i.MX 8M Quad AIY boards.

**Table 8. Images for i.MX 8M Quad AIY**

<b>i.MX 8MQuad AIY image</b>	<b>Descriptions</b>
u-boot-imx8mq.imx	Bootloader used by UUU for i.MX 8M Quad AIY board. It is not flashed to MMC.
u-boot-imx8mq-aiy-uuu.imx	Bootloader used by UUU for i.MX 8M Quad AIY board. It is not flashed to MMC.
boot.img	Boot image to support HDMI display.
partition-table-7GB.img	GPT table image for 8 GB boot storage.
partition-table.img	GPT table image for 16 GB boot storage.
vbmata-imx8mq.img	Android Verified Boot metadata image for i.MX 8M Quad AIY board to support HDMI display.
system.img	System image.
vendor.img	Vendor image
dtbo-imx8mq.img	Device Tree image for i.MX 8M Quad AIY.
rpmb_key_test.bin	Prebuilt test RPMB key. It can be used to set the RPMB key as fixed 32 bytes 0x00.
testkey_public_rsa4096.bin	Prebuilt AVB public key, which is extracted from the default AVB private key.

The following tables list the detailed contents of android\_p9.0.0\_2.3.0\_image\_8mnevk.tar.gz image package.

The table below shows the prebuilt images to support the system on i.MX 8M Nano boards.

**Table 9. Images for i.MX 8M Nano**

<b>i.MX 8M Nano image</b>	<b>Descriptions</b>
u-boot-imx8mn.imx	Bootloader without Trusty OS integrated into it for i.MX 8M Nano board.
u-boot-imx8mn-trusty.imx	Bootloader with Trusty OS integrated into it for i.MX 8M Nano board.
u-boot-imx8mn-evk-uuu.imx	Bootloader used by UUU for i.MX 8M Nano board. It is not flashed to MMC.
boot.img	Boot image for i.MX 8M Nano board.
system.img	System Boot image for i.MX 8M Nano board.
vendor.img	Vendor image for i.MX 8M Nano board.

*Table continues on the next page...*

**Table 9. Images for i.MX 8M Nano (continued)**

partition-table.img	GPT table image for 16 GB SD card and eMMC.
partition-table-7GB.img	GPT table image for 8 GB SD card.
partition-table-28GB.img	GPT table image for 32 GB SD card.
imx8mn_mcu_demo.img	MCU image for i.MX 8M Nano board.
dtbo-imx8mn.img	Device Tree image for i.MX 8M Nano board to support MIPI-to-HDMI output.
dtbo-imx8mn-rpmsg.img	Device Tree image for i.MX 8M Nano board to support MIPI-to-HDMI output and MCU image.
dtbo-imx8mn-mipi-panel.img	Device Tree image for i.MX 8M Nano board to support MIPI panel output.
vbmeta-imx8mn.img	Android Verify Boot metadata image for i.MX 8M Nano board to support MIPI-to-HDMI output.
vbmeta-imx8mn-rpmsg.img	Android Verify Boot metadata image for i.MX 8M Nano board to support MIPI-to-HDMI output and mcu image.
vbmeta-imx8mn-mipi-panel.img	Android Verify Boot metadata image for i.MX 8M Nano board to support MIPI panel output.
rpmb_key_test.bin	Prebuilt test RPMB key, which can be used to set the RPMB key as fixed 32 bytes 0x00.
testkey_public_rsa4096.bin	Prebuilt AVB public key, which is extracted from the default AVB private key.

The following tables list the detailed contents of android\_p9.0.0\_2.3.0\_image\_8qmek.tar.gz image package.

The table below shows the prebuilt images to support the system on i.MX 8QuadXPlus MEK boards.

**Table 10. Images for i.MX 8QuadXPlus MEK**

<b>i.MX 8QuadXPlus MEK image</b>	<b>Description</b>
u-boot-imx8qxp.imx	Bootloader (with padding) for i.MX 8QuadXPlus MEK board
u-boot-imx8qxp-mek-uuu.imx	Bootloader used by UUU for the i.MX 8QuadXPlus MEK board. It is not flashed to MMC.
boot.img	Boot image for i.MX 8QuadXPlus MEK board
system.img	System Boot image for i.MX 8QuadXPlus MEK board
vendor.img	Vendor image for i.MX 8QuadXPlus MEK board
partition-table.img	GPT table image for 16 GB boot storage.
partition-table-7GB.img	GPT table image for 8 GB boot storage.
partition-table-28GB.img	GPT table image for 32 GB boot storage.
vbmeta-imx8qxp.img	Android Verify Boot metadata image for i.MX 8QuadXPlus MEK board to support single LVDS-to-HDMI/MIPI-to-HDMI or dual LVDS-to-HDMI display with dual camera support.
dtbo-imx8qxp.img	Device Tree image for i.MX 8QuadXPlus MEK board to support single LVDS-to-HDMI/MIPI-to-HDMI or dual LVDS-to-HDMI display with dual camera support.

**NOTE**

boot.img is an Android image that stores Image and ramdisk together. It can also store other information such as the kernel boot command line and machine name. This information can be configured in android.mk. It can avoid touching boot loader code to change any default boot arguments.

## 5 Programming Images

The images from the prebuilt release package or created from source code contain the U-Boot boot loader, system image, GPT image, vendor image, and vbmeta image. At a minimum, the storage devices on the development system (MMC/SD) must be programmed with the U-Boot boot loader. The i.MX 8 series boot process determines what storage device to access based on the switch settings. When the boot loader is loaded and begins execution, the U-Boot environment space is then read to determine how to proceed with the boot process. For U-Boot environment settings, see Section [Bootimg](#).

The following download methods can be used to write the Android System Image:

- UUU to download all images to the eMMC/SD card.
- fsl-sdcard-partition.sh to download all images to the SD card.
- fastboot\_imx\_flashall script to download all images to the eMMC/SD storage.

### 5.1 System on eMMC/SD

The images needed to create an Android system on eMMC/SD can either be obtained from the release package or be built from source.

The images needed to create an Android system on eMMC/SD are listed below:

- U-Boot image: u-boot.imx
- GPT table image: partition-table.img
- Android dtbo image: dtbo.img
- Android boot image: boot.img
- Android system image: system.img
- Android verify boot metadata image: vbmeta.img
- Android vendor image: vendor.img

#### 5.1.1 Storage partitions

The layout of the eMMC card for Android system is shown below:

- [Partition type/index] which is defined in the GPT.
- [Start Offset] shows where partition is started, unit in MB.

The system partition is used to put the built-out Android system image. The userdata partition is used to put the unpacked codes/data of the applications, system configuration database, etc. In normal boot mode, the root file system is mounted from the system partition. In recovery mode, the root file system is mounted from the boot partition.

**Table 11. Storage partitions**

Partition type/index	Name	Start offset	Size	File system	Content
N/A	bootloader	0 KB (i.MX 8M Nano eMMC), 32 KB (i.MX 8QuadXPlus and i.MX 8M Nano SD card) or 33 KB (i.MX 8M Quad, i.MX 8M Mini)	4 MB	N/A	bootloader
1	dtbo_a	8 MB	4 MB	N/A	dtbo.img
2	dtbo_b	Follow dtbo_a	4 MB	N/A	dtbo.img
3	boot_a	Follow dtbo_b	48 MB	boot.img format, a kernel + recovery ramdisk	boot.img
4	boot_b	Follow boot_a	48 MB	boot.img format, a kernel + recovery ramdisk	boot.img
5	system_a	Follow boot_b	1536 MB	EXT4. Mount as /system	Android system files under /system/dir
6	system_b	Follow system_a	1536 MB	EXT4. Mount as /system	Android system files under /system/dir
7	misc	Follow system_b	4 MB	N/A	For recovery store bootloader message, reserve
8	metadata	Follow misc	2 MB	N/A	For system slide show
9	persistdata	Follow metadata	1 MB	N/A	Option to operate unlock \unlock
10	vendor_a	Follow persistdata	256 MB	EXT4. Mount at /vendor	vendor.img
11	vendor_b	Follow vendor_a	256 MB	EXT4. Mount at /vendor	vendor.img
12	userdata	Follow vendor_b	Remained space	EXT4. Mount at /data	Application data storage for system application, and for internal media partition, in /mnt/sdcard/ dir.
13	fbmisc	Follow userdata	1 MB	N/A	For storing the state of lock \unlock
14	vbmeta_a	Follow fbmisc	1 MB	N/A	For storing the verify boot's metadata
15	vbmeta_b	Follow vbmeta_a	1 MB	N/A	For storing the verify boot's metadata

To create these partitions, use UUU described in the *Android™ Quick Start Guide (AQSUG)*, or use format tools in the prebuilt directory.

The script below can be used to partition an SD Card and download images to them as shown in the partition table above:

```
$ cd ${MY_ANDROID}/
$ sudo ./device/fsl/common/tools/fsl-sdcard-partition.sh -f <soc_name> /dev/sdX
# <soc_name> can be imx8mm, imx8mn, imx8mq, imx8qxp.
```

**NOTE**

- The minimum size of the SD card is 8 GB bytes.
- If the SD card is 8 GB, use `sudo ./device/fsl/common/tools/fsl-sdcard-partition.sh -f <soc_name> -c 7 /dev/sdX` to flash images.
- If the SD card is 16 GB, use `sudo ./device/fsl/common/tools/fsl-sdcard-partition.sh -f <soc_name> /dev/sdX` to flash images.
- If the SD card is 32 GB, use `sudo ./device/fsl/common/tools/fsl-sdcard-partition.sh -f <soc_name> -c 28 /dev/sdX` to flash images.
- /dev/sdX, the X is the disk index from 'a' to 'z', which may be different on each Linux PC.
- Unmount all the SD card partitions before running the script.
- Put related bootloader, boot image, system image, and vbmeta image in your current directory.
- This script needs `simg2img` tool to be installed on your PC. The `simg2img` is a tool that converts sparse system image to raw system image on the host PC running Linux OS. The `android-tools-fsutils` package includes the `simg2img` command for Ubuntu Linux.

## 5.1.2 Downloading images with UUU

UUU can be used to download all images into a target device. It is a quick and easy tool for downloading images. See the *Android™ Quick Start Guide (AQSUG)* for detailed description of UUU.

## 5.1.3 Downloading images with `fastboot_imx_flashall` script

UUU can be used to flash the Android system image into the board, but it needs to make the board enter serial down mode first, and make the board enter boot mode once flashing is finished.

A new `fastboot_imx_flashall` script is supported to use `fastboot` to flash the Android system image into the board. It is more flexible. To use the new script, the board must be able to enter `fastboot` mode and the device must be unlocked. The table below lists the `fastboot_imx_flashall` scripts.

**Table 12. `fastboot_imx_flashall` script**

Name	Host system to execute the script
<code>fastboot_imx_flashall.sh</code>	Linux OS
<code>fastboot_imx_flashall.bat</code>	Windows OS

With the help of `fastboot_imx_flashall` scripts, you do not need to use `fastboot` to flash Android images one-by-one manually. These scripts will automatically flash all images with only one command.

`fastboot` can be built with Android build system. Based on Section 3, which introduces how to build android images, perform the following steps to build `fastboot`:

```
$ cd ${MY_ANDROID}
$ make -j4 fastboot
```

After the build process finishes building `fastboot`, the directory to find the `fastboot` is as follows:

- Linux version binary file: `${MY_ANDROID}/host/linux-x86/bin/`
- Windows version binary file: `${MY_ANDROID}/host/windows-x86/bin/`

The way to use these scripts is follows:

## Booting

- Linux shell script usage: `sudo fastboot_imx_flashall.sh <option>`
- Windows batch script usage: `fastboot_imx_flashall.bat <option>`

### Options:

```
-h                Displays this help message
-f soc_name      Flashes the Android image file with soc_name
-a              Only flashes the image to slot_a
-b              Only flashes the image to slot_b
-c card_size     Optional setting: 7 / 14 / 28
                  If it is not set, use partition-table.img (default).
                  If it is set to 7, use partition-table-7GB.img for 8 GB SD card.
                  If it is set to 14, use partition-table-14GB.img for 16 GB SD card.
                  If it is set to 28, use partition-table-28GB.img for 32 GB SD card.
                  Make sure that the corresponding file exists on your platform.
-m              Flashes the MCU image.
-d dev          Flash dtbo, vbmeta, and recovery image file with dev.
                  If it is not set, use default dtbo, vbmeta, and recovery image.
-e              Erases user data after all image files are flashed.
-l              Locks the device after all image files are flashed.
-D directory    Directory of images.
                  If this script is execute in the directory of the images, it does not
need to use this option.
-s ser_num      Serial number of the board.
                  If only one board connected to computer, it does not need to use this
option
-tos           Flashes the U-Boot with Trusty OS enabled for i.MX 8M Mini EVK and
i.MX 8M Nano EVK.
```

### NOTE

- -f option is mandatory. SoC name can be `imx8mm`, `imx8mn`, `imx8mq`, `imx8qxp`.
- Boot the device to U-Boot fastboot mode, and then execute these scripts. The device should be unlocked first.
- -tos mode only works for eMMC boot mode.

### Example:

```
sudo ./fastboot_imx_flashall.sh -f imx8mm -a -e -tos -D /imx_pi9.0/evk_8mm/
```

### Options explanation:

- -f `imx8mm`: flashes images for i.MX 8M Mini EVK Board.
- -a: Only flashes slot a.
- -e: Erases user data after all image files are flashed.
- -D `/imx_pi9.0/evk_8mm/`: images to be flashed are in the directory of `/imx_pi9.0/evk_8mm/`.
- -tos: flashes the bootloader with Trusty OS enabled.

## 6 Booting

This chapter describes booting from MMC/SD.

### 6.1 Booting from eMMC/SD

#### 6.1.1 Booting from SD/eMMC on the i.MX 8M Mini EVK board

The following tables list the boot switch settings to control the boot storage for Rev. B boards with LPDDR4.

**Table 13. Boot device switch settings**

Boot device switch	SW1101 (1-8 bit)	SW1102 (1-8 bit)
SD boot	01000100	00110100
eMMC boot	01110010	00001010

**Table 14. Boot mode switch settings**

Boot mode switch	SW1101 (1-2 bit)
Download mode	10

The following tables list the boot switch settings to control the boot storage for Rev. C boards with DDR4.

**Table 15. Boot device switch settings**

Boot device switch	SW1101 (1-10 bit)	SW1102 (1-10 bit)
SD boot	0110110010	0001101000

**Table 16. Boot mode switch settings**

Boot mode switch	SW1101 (1-4 bit)
Download mode	1010

For Rev. B boards with LPDDR4:

- To test booting from SD, change the board Boot\_Mode switch to SW1101 01000100 (1-8 bit) and SW1102 00110100 (1-8 bit).
- To test booting from eMMC, change the board Boot\_Mode switch to SW1101 01110010 (1-8 bit) and SW1102 00001010 (1-8 bit).

For Rev. C boards with DDR4:

To test booting from SD, change the board Boot\_Mode switch to SW1101 0110110010 (1-10 bit) and SW1102 0001101000 (1-10 bit).

The default environment in boot.img is booting from eMMC. To use the default environment in boot.img, do not set bootargs environment in U-Boot.

To clear the bootargs environment being set and saved before, use the following command:

```
U-Boot > setenv bootargs
U-Boot > saveenv          #Save the environments
```

**NOTE**

bootargs environment is an optional setting for boota. The boot.img includes a default bootargs, which is used if there is no bootargs defined in U-Boot.

**6.1.2 Booting from SD/eMMC on the i.MX 8M Nano board**

The following tables list the boot switch settings to control the boot storage.

**Table 17. Boot device switch settings**

Boot mode switch	SW1101 (from 1-4 bit)
download mode	1000

**Table 18. Boot mode switch settings**

Boot mode switch	SW1101 (from 1-4 bit)
eMMC boot	0100

- To boot from SD, change the board Boot\_Mode switch to SW1101 1100 (from 1-4 bit).
- To boot from eMMC, change the board Boot\_Mode switch to SW1101 0100 (from 1-8 bit).

The default environment in boot.img is booting from eMMC. To use the default environment in boot.img, do not set bootargs environment in U-Boot.

To clear the bootargs environment being set and saved before, use the following command:

```
U-Boot > setenv bootargs
U-Boot > saveenv          # Save the environments
```

**NOTE**

bootargs environment is an optional setting for boota. The boot.img includes a default bootargs, which is used if there is no bootargs defined in U-Boot.

### 6.1.3 Booting from SD/eMMC on the i.MX 8MQuad AIY board

The following tables list the boot switch settings to control the boot storage.

**Table 19. Boot device switch settings**

i.MX 8MQuad AIY boot switch	Download mode (UUU mode)	eMMC boot
SW1 Boot_Mode (from 1-4 bit)	0100	1000

To boot from eMMC, change the board Boot\_Mode switch to 1000 (from 1-4 bit) for i.MX 8M Quad AIY.

The default environment in boot.img is booting from eMMC. To use the default environment in boot.img, do not set bootargs environment in U-Boot.

To clear the bootargs environment being set and saved before, use the following command:

```
U-Boot > setenv bootargs
U-Boot > saveenv          # Save the environments
```

### 6.1.4 Booting from SD/eMMC on the i.MX 8QuadXPlus MEK board

The following tables list the boot switch settings to control the boot storage.



**Table 20. Boot device switch settings**

i.MX 8QuadXPlus boot switch	Download mode (UUU mode)	SD boot	eMMC boot
SW2 Boot_Mode (1-4 bit)	1000	1100	0100

To test booting from SD, change the board Boot\_Mode switch to 1100 (1-4 bit).

To test booting from eMMC, change the board Boot\_Mode switch to 0100 (1-4 bit).

The default environment in boot.img is booting from eMMC. To use the default environment in boot.img, do not set bootargs environment in U-Boot.

To clear the bootargs environment being set and saved before, use the following command:

```
U-Boot > setenv bootargs
U-Boot > saveenv          # Save the environments
```

#### NOTE

bootargs environment is an optional setting for boota. The boot.img includes a default bootargs, which is used if there is no bootargs defined in U-Boot.

## 6.2 Boot-up configurations

This section explains some common boot-up configurations such as U-Boot environments, kernel command line, and DM-verity configurations.

### 6.2.1 U-Boot environment

- bootcmd: the first variable to run after U-Boot boot.
- bootargs: the kernel command line, which the bootloader passes to the kernel. As described in [Kernel command line \(bootargs\)](#), bootargs environment is optional for booti. boot.img already has bootargs. If you do not define the bootargs environment, it uses the default bootargs inside the image. If you have the environment, it is then used.

To use the default environment in boot.img, use the following command to clear the bootargs environment.

- ```
> setenv bootargs
```
- boota:

boota command parses the boot.img header to get the Image and ramdisk. It also passes the bootargs as needed (it only passes bootargs in boot.img when it cannot find "bootargs" var in your U-Boot environment). To boot the system, do the following:

```
> boota
```

To boot into recovery mode, execute the following command:

```
> boota recovery
```

If you have read the boot.img into memory, use this command to boot from

```
> boota 0xXXXXXXXX
```

## 6.2.2 Kernel command line (bootargs)

Depending on the different booting/usage scenarios, you may need different kernel boot parameters set for bootargs.

**Table 21. Kernel boot parameters**

| Kernel parameter            | Description                                                                                                                                                                                                        | Typical value                                                                                                                                                                                                                                         | Used when                                                                                                                                                                                                                                                                                                                                            |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| console                     | Where to output kernel log by printk.                                                                                                                                                                              | console=ttyMXC0                                                                                                                                                                                                                                       | i.MX 8M Mini use console=ttyMXC0.                                                                                                                                                                                                                                                                                                                    |
| init                        | Tells kernel where the init file is located.                                                                                                                                                                       | init=/init                                                                                                                                                                                                                                            | All use cases. "init" in the Android platform is located in "/" instead of in "/sbin".                                                                                                                                                                                                                                                               |
| androidboot.console         | The Android shell console. It should be the same as console=.                                                                                                                                                      | androidboot.console=ttyMXC0                                                                                                                                                                                                                           | To use the default shell job control, such as Ctrl+C to terminate a running process, set this for the kernel.                                                                                                                                                                                                                                        |
| cma                         | CMA memory size for GPU/VPU physical memory allocation.                                                                                                                                                            | <ul style="list-style-type: none"> <li>For i.MX 8M Mini EVK and i.MX 8M Nano EVK, it is 800 MB by default.</li> <li>For i.MX 8M Quad AIY, it is 384 MB by default.</li> <li>For i.MX 8QuadXPlus, it is 800 MB by default.</li> </ul>                  | cma=800M@0x960M-0xe00M indicates that the start address is 0x96000000 and the end address is 0xDFFFFFFF. The CMA size can be configured to other value, but cannot exceed 1184 MB, because the Cortex-M4 core will also allocate memory from CMA and Cortex-M4 cannot use the memory larger than 0xDFFFFFFF.                                         |
| androidboot.selinux         | Argument to disable selinux check and enable serial input when connecting a host computer to the target board's USB UART port. For details about selinux, see <a href="#">Security-Enhanced Linux in Android</a> . | androidboot.selinux=permissive                                                                                                                                                                                                                        | <p>Android Pie 9.0 CTS requirement: serial input should be disabled by default.</p> <p>Setting this argument enables console serial input, which will violate the CTS requirement.</p> <p>Setting this argument will also bypass all the selinux rules defined in Android system. It is recommended to set this argument for internal developer.</p> |
| androidboot.primary_display | It is used to choose and fix primary display.                                                                                                                                                                      | androidboot.primary_display=imx-drm                                                                                                                                                                                                                   | androidboot.primary_display=mxsfb-drm is only used for MIPI display.                                                                                                                                                                                                                                                                                 |
| androidboot.lcd_density     | It is used to set the display density and over write ro.sf.lcd_density in init.rc for MIPI-to-HDMI display.                                                                                                        | androidboot.lcd_density=160                                                                                                                                                                                                                           | -                                                                                                                                                                                                                                                                                                                                                    |
| androidboot.displaymode     | It is used to configure the kernel/driver work mode/fps.                                                                                                                                                           | <ul style="list-style-type: none"> <li>4k display should be configured as: androidboot.displaymode=4k. The default fps is 60fps. To configure fps, change this value to 4kp60/4kp50/4kp30.</li> <li>1080p display should be configured as:</li> </ul> | The system will find out and work at the best display mode, and display mode can be changed through this bootargs.                                                                                                                                                                                                                                   |

Table continues on the next page...

**Table 21. Kernel boot parameters (continued)**

| Kernel parameter               | Description                                                                             | Typical value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Used when                                                                            |
|--------------------------------|-----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|                                |                                                                                         | <p>androidboot.displaymode=1080p. The default fps is 60fps. To configure fps, change this value to 1080p60/1080p50/1080p30.</p> <ul style="list-style-type: none"> <li>720p display should be configured as:<br/>androidboot.displaymode=720p. The default fps is 60fps. To configure fps, change this value to 720p60/720p50/720p30.</li> <li>480p display should be configured as:<br/>androidboot.displaymode=480p. The default fps is 60fps. To configure fps, change this value to 480p60/480p50/480p30.</li> </ul> |                                                                                      |
| androidboot.fbTileSupport      | It is used to enable framebuffer super tile output.                                     | androidboot.fbTileSupport=enable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | It should not be set when connecting the MIPI-to-HDMI display or MIPI panel display. |
| firmware_class.path            | It is used to set the Wi-Fi firmware path.                                              | firmware_class.path=/vendor/firmware                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | -                                                                                    |
| androidboot.wificountrycode=CN | It is used to set Wi-Fi country code. Different countries use different Wi-Fi channels. | androidboot.wificountrycode=CN                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | For details, see the <a href="#">Android™ Frequently Asked Questions</a> .           |
| transparent_hugepage           | It is used to change the sysfs boot time defaults of Transparent Hugepage support.      | transparent_hugepage=never/always/madvise                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | -                                                                                    |
| loop.max_part                  | It defines how many partitions to be able to manage per loop device.                    | loop.max_part=7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | -                                                                                    |

### 6.2.3 DM-verity configuration

DM-verity (device-mapper-verity) provides transparent integrity checking of block devices. It can prevent device from running unauthorized images. This feature is enabled by default. Replacing one or more partitions (boot, vendor, system, vbmeta) will make the board unbootable. Disabling DM-verity provides convenience for developers, but the device is unprotected.

## Over-The-Air (OTA) Update

To disable DM-verity, perform the following steps:

1. Unlock the device.
  - a. Boot up the device.
  - b. Choose **Settings** -> **Developer Options** -> **OEM Unlocking** to enable OEM unlocking.
  - c. Execute the following command on the target side to make the board enter fastboot mode:

```
reboot bootloader
```

- d. Unlock the device. Execute the following command on the host side:

```
fastboot oem unlock
```

- e. Wait until the unlock process is complete.
2. Disable DM-verity.
  - a. Boot up the device.
  - b. Disable the DM-verity feature. Execute the following command on the host side:

```
adb root
adb disable-verity
adb reboot
```

## 7 Over-The-Air (OTA) Update

### 7.1 Building OTA update packages

#### 7.1.1 Building target files

You can use the following commands to generate target files under the Android environment:

```
$ cd ${MY_ANDROID}
$ source build/envsetup.sh
$ lunch evk_8mm-userdebug
$ make target-files-package -j4
```

After building is complete, you can find the target files in the following path:

```
${MY_ANDROID}/out/target/product/evk_8mm/obj/PACKAGING/target_files_intermediates/evk_8mm-
target_files-${date}.zip
```

#### 7.1.2 Building a full update package

A full update is one where the entire final state of the device (system, boot, and vendor partitions) is contained in the package.

You can use the following commands to build a full update package under the Android environment:

```
$ cd ${MY_ANDROID}
$ source build/envsetup.sh
$ lunch evk_8mm-userdebug
$ make otapackage -j4
```

After building is complete, you can find the OTA packages in the following path:

```
${MY_ANDROID}/out/target/prouduct/evk_8mm/evk_8mm-ota-${date}.zip
```

evk\_8mm-ota-`{date}`.zip includes `payload.bin` and `payload_properties.txt`. The two files are used for full update.

#### NOTE

- `{date}` is the `BUILD_NUMBER` in `build_id.mk`.

### 7.1.3 Building an incremental update package

An incremental update contains a set of binary patches to be applied to the data that is already on the device. This can result in considerably smaller update packages:

- Files that have not changed do not need to be included.
- Files that have changed are often very similar to their previous versions, so the package only needs to contain encoding of the differences between the two files. You can install the incremental update package only on a device that has the old or source build used when constructing the package.

Before building an incremental update package, see Section 7.1.1 to build two target files:

- `PREVIOUS-target_files.zip`: one old package that has already been applied on the device.
- `NEW-target_files.zip`: the latest package that is waiting to be applied on the device.

Then use the following commands to generate the incremental update package under the Android environment:

```
$ cd ${MY_ANDROID}
$ ./build/tools/releasetools/ota_from_target_files -i PREVIOUS-target_files.zip NEW-target_files.zip incremental_ota_update.zip
```

`{MY_ANDROID}/incremental_ota_update.zip` includes `payload.bin` and `payload_properties.txt`. The two files are used for incremental update.

## 7.2 Implementing OTA update

### 7.2.1 Using `update_engine_client` to update the Android platform

`update_engine_client` is a pre-built tool to support A/B (seamless) system updates. It supports update system from a remote server or board's storage.

To update system from a remote server, perform the following steps:

1. Copy `ota_update.zip` or `incremental_ota_update.zip` (generated on 7.1.2 and 7.1.3) to the HTTP server (for example, `192.168.1.1:/var/www/`).
2. Unzip the packages to get `payload.bin` and `payload_properties.txt`.
3. Cat the content of `payload_properties.txt` like this:
  - `FILE_HASH=0fSBbXonyTjaAzMpwTBgM9AVtlBeyOigpCCgkoOfHKY=`
  - `FILE_SIZE=379074366`
  - `METADATA_HASH=Icrs3NqoglyzppyCZouWKbo5f08IPokhlUfHDmz77WQ=`
  - `METADATA_SIZE=46866`
4. Input the following command on the board's console to update:

```
update_engine_client --payload=http://192.168.1.1:10888/payload.bin --update --
headers="FILE_HASH=0fSBbXonyTjaAzMpwTBgM9AVtlBeyOigpCCgkoOfHKY=
FILE_SIZE=379074366
METADATA_HASH=Icrs3NqoglyzppyCZouWKbo5f08IPokhlUfHDmz77WQ=
METADATA_SIZE=46866"
```

5. The system will update in the background. After it finishes, it will show "Update successfully applied, waiting to reboot" in the logcat.

## Over-The-Air (OTA) Update

To update system from board's storage, perform the following steps:

1. Unzip `ota_update.zip` or `incremental_ota_update.zip` (Generated on 7.1.2 and 7.1.3) to get `payload.bin` and `payload_properties.txt`.
2. Push `payload.bin` to board's `/sdcard` dir: `adb push payload.bin /sdcard/`.
3. Cat the content of `payload_properties.txt` like this:
  - `FILE_HASH=0fSBbXonyTjaAzMpwTBgM9AVt1BeyOigpCCgkoOfHKY=`
  - `FILE_SIZE=379074366`
  - `METADATA_HASH=Icrs3NqoglyzppyCZouWKbo5f08IPokhlUfHDmz77WQ=`
  - `METADATA_SIZE=46866`
4. Input the following command on the board's console to update:

```
update_engine_client --payload=file:///sdcard/payload.bin --update --
headers="FILE_HASH=0fSBbXonyTjaAzMpwTBgM9AVt1BeyOigpCCgkoOfHKY=
FILE_SIZE=379074366
METADATA_HASH=Icrs3NqoglyzppyCZouWKbo5f08IPokhlUfHDmz77WQ=
METADATA_SIZE=46866"
```

5. The system will update in the background. After it finishes, it will show "Update successfully applied, waiting to reboot" in the logcat.

### NOTE

Make sure that the `--header` equals to the exact content of `payload_properties.txt` without "space" or "return" character.

## 7.2.2 Using a customized application to update the Android platform

There is a reference OTA application under `/${MY_ANDROID}/vendor/nxp-opensource/fsl_imx_demo/FSLOta`, which can do the OTA operations:

1. Get `payload_properties.txt` and `payload.bin` from a specific address.
2. Use the `update_engine` service to update the Android platform.

Perform the following steps to use this application:

1. Set up the HTTP server (eg., `lighttpd`, `apache`).

You need one HTTP server to hold OTA packages.

- For full OTA update, execute the following commands:

```
cp ${MY_ANDROID}/out/target/product/evk_8mm/system/build.prop ${server_ota_folder}
cp ${MY_ANDROID}/out/target/product/evk_8mm/evk_8mm-ota-${date}.zip ${server_ota_folder}
cd ${server_ota_folder}
unzip evk_8mm-ota-${date}.zip
```

- For incremental OTA update, execute the following commands:

```
cp ${old_build.prop} ${server_ota_folder}/old_build.prop
cp ${MY_ANDROID}/out/target/product/evk_8mm/system/build.prop ${server_ota_folder}/
build_diff.prop
mkdir ${server_ota_folder}/diff_ota
cp ${MY_ANDROID}/incremental_ota_update.zip ${server_ota_folder}/diff_ota
cd ${server_ota_folder}/diff_ota
unzip incremental_ota_update.zip
mv payload.bin payload_diff.bin
mv payload_properties.txt payload_properties_diff.txt
mv payload_diff.bin payload_properties_diff.txt ${server_ota_folder}
cd ${server_ota_folder}
echo -n "base." >> build_diff.prop
grep "ro.build.date.utc" old_build.prop >> build_diff.prop
```

For example, the `server_ota_folder` content is like this (Make sure that you have at least 6 files as follows in `server_ota_folder`, or the OTA application will be aborted):

```
build@server:/var/www/evk_8mm_pie_9$ ls
build.prop build_diff.prop payload.bin payload_diff.bin payload_properties.txt
payload_properties_diff.txt
```

**NOTE**

- server\_ota\_folder: `${http_root}/evk_8mm_${ota_folder_suffix}_${version}`.
- `${old_build.prop}` is the old image's build.prop.
- `evk_8mm-ota-${date}-${soc}.zip` and `incremental_ota_update.zip` are built from Section 7.1.2 "Building a full update package" and Section 7.1.3 "Building an incremental update package".
- `${ota_folder_suffix}` is stored at board's `/vendor/etc/ota.conf`.
- `${version}` can be obtained by the following command on the board's console: `$getprop ro.build.version.release`.
- These file and folder names should align with this example, or modify the OTA application source code correspondingly.

2. Configure the OTA server IP address and HTTP port number.

The OTA configuration file (`/vendor/etc/ota.conf`) content is like this:

```
server=192.168.1.100
port=10888
ota_folder_suffix=pie
```

Modify it to fit the environment.

3. Open the OTA application and click the **Update** button.

The reference application is a dialogue box activity, and can be enabled through the **Settings -> About tablet -> Additional system Update** menu. There are two buttons on the dialogue box:

- **Upgrade:** Performs full OTA.
- **Diff Upgrade:** Performs incremental OTA.

Click one button to update the Android platform. After update is complete, click the **Reboot** button on the dialogue box.

**NOTE**

- This application uses the `"ro.build.date.utc=1528987645"` property to decide whether it can perform full OTA or incremental OTA.
- `local utc = $getprop ro.build.date.utc`.
- `remote utc = cat ${server_ota_folder}/build.prop | grep "ro.build.date.utc"`.
- `remote diff utc = cat ${server_ota_folder}/build_diff.prop | grep "ro.build.date.utc"`.
- `remote diff base utc = cat ${server_ota_folder}/build_diff.prop | grep "base.ro.build.date.utc"` (`base.ro.build.date.utc` should be added manually, which is the `"ro.build.date.utc"` value in PREVIOUS-target\_files.zip's system/build.prop).
- Full OTA condition:
  - `local utc < remote utc`
- Incremental OTA condition:
  - `local utc = remote diff base utc`
  - `local utc < remote diff utc`

**NOTE**

The OTA package includes the DTBO image, which stores the board's DTB. There may be many DTS for one board. For example, in `${MY_ANDROID}/device/fsl/imx8m/evk_8mm/BoardConfig.mk`:

```
TARGET_BOARD_DTS_CONFIG ?= imx8mm:fsl-imx8mm-trusty-evk.dtb

TARGET_BOARD_DTS_CONFIG += imx8mm-mipi-panel:fsl-imx8mm-evk-
rm67191.dtb
```

```
TARGET_BOARD_DTS_CONFIG += imx8mm-m4:fsl-imx8mm-evk-m4.dtb
```

```
TARGET_BOARD_DTS_CONFIG += imx8mm-ddr4:fsl-imx8mm-ddr4-evk.dtb
```

There is one variable to specify which dtbo image is stored in the OTA package:

```
BOARD_PREBUILT_DTBOIMAGE := out/target/product/evk_8mm/dtbo-  
imx8mm.img
```

Therefore, the default OTA package can only be applied for evk\_8mm with single MIPI-to-HDMI display. To generate the OTA package for evk\_8mm with MIPI panel display, modify this BOARD\_PREBUILT\_DTBOIMAGE as follows:

```
BOARD_PREBUILT_DTBOIMAGE := out/target/product/evk_8mm/dtbo-  
imx8mm-mipi-panel.img
```

For detailed information about A/B OTA updates, see <https://source.android.com/devices/tech/ota/ab/>.

## 8 Customized Configuration

### 8.1 How to change boot command line in boot.img

After boot.img is used, the default kernel boot command line is stored inside the image. It packages together during android build.

You can change this by changing BOARD\_KERNEL\_CMDLINE's definition in BoardConfig.mk file under \$ {MY\_ANDROID}/device/fsl.

#### NOTE

- For the i.MX 8M Mini board, the source folder is \${MY\_ANDROID}/device/fsl/imx8m/evk\_8mm/BoardConfig.mk.
- For i.MX 8M Nano Board, source folder is \${MY\_ANDROID}/device/fsl/imx8m/evk\_8mn/BoardConfig.mk.
- For i.MX 8MQuad AIY Board, source folder is \${MY\_ANDROID}/device/fsl/imx8m/aiy\_8mq/BoardConfig.mk.
- For the i.MX 8QuadXPlus MEK board, the source folder is \${MY\_ANDROID}/device/fsl/imx8q/mek\_8q/BoardConfig.mk.

### 8.2 How to configure the rear and front cameras

Property "back\_camera\_name" and "front\_camera\_name" are used to configure which camera to be used as the rear camera or front camera.

The name should be either v4l2\_dbg\_chip\_ident.match.name returned from v4l2's IOCTL VIDIOC\_DBG\_G\_CHIP\_IDENT or v4l2\_capability.driver returned from v4l2's IOCTL VIDIOC\_QUERYCAP.

Camera HAL goes through all the V4L2 devices in the system. Camera HAL chooses the first matched name in property settings as the corresponding camera. Comma is used as a delimiter of different camera name among multiple-camera selection.

The following is an example set in \${MY\_ANDROID}/device/fsl/imx8m/evk\_8mm/init.rc.



```
setprop back_camera_name mx6s-csi
setprop front_camera_name uvc
```

media\_profiles\_V1\_0.xml in /vendor/etc is used to configure the parameters used in the recording video. NXP provides several media profile examples that help customer align the parameters with their camera module capability and device definition.

**Table 22. Media profile parameters**

| Profile file name        | Rear camera                                              | Front camera                                             |
|--------------------------|----------------------------------------------------------|----------------------------------------------------------|
| media_profiles_1080p.xml | Maximum to 1080P, 30FPS and 8 Mbps for recording video   | Maximum to 720P, 30FPS, and 3 Mbps for recording video   |
| media_profiles_720p.xml  | Maximum to 720P, 30FPS, and 3 Mbps for recording video   | Maximum to 720P, 30FPS, and 3 Mbps for recording video   |
| media_profiles_480p.xml  | Maximum to 480P, 30FPS, and 2 Mbps for recording video   | Maximum to 480P, 30FPS, and 2 Mbps for recording video   |
| media_profiles_qvga.xml  | Maximum to QVGA, 15FPS, and 128 Kbps for recording video | Maximum to QVGA, 15FPS, and 128 Kbps for recording video |

**NOTE**

Because not all UVC cameras can have 1080P, 30FPS resolution setting, it is recommended that media\_profiles\_480p.xml is used for any board's configuration, which defines the UVC as the rear camera or front camera.

### 8.3 How to configure camera sensor parameters

Camera sensor parameters are used to calculate view angle when doing panorama. The focal length and sensitive element size should be customized based on the camera sensor being used. The default release have the parameters for OV5640 as the front/back camera.

Ov5640xxx.cpp in vendor/nxp-opensource/imx/libcamera3 are provided to configure sensor. They implement class OV5640xxx.

For a new camera sensor, a new camera sensor class should be created with the corresponding focal length and sensitive element size as the variables mFocalLength, mPhysical.

**Table 23. Camera sensor parameters**

| Parameter       | Discription              |
|-----------------|--------------------------|
| mFocalLength    | Sensor focal length      |
| mPhysicalWidth  | Sensitive element width  |
| mPhysicalHeight | Sensitive element height |

### 8.4 How to configure the logical display density

The Android UI framework defines a set of standard logical densities to help application developers target application resources.

Device implementations must report one of the following logical Android framework densities:

## Customized Configuration

- 120 dpi, known as 'ldpi'
- 160 dpi, known as 'mdpi'
- 213 dpi, known as 'tvdpi'
- 240 dpi, known as 'hdpi'
- 320 dpi, known as 'xhdpi'
- 480 dpi, known as 'xxhdpi'

Device implementations should define the standard Android framework density that is numerically closest to the physical density of the screen, unless that logical density pushes the reported screen size below the minimum supported.

To configure the logical display density for framework, you must define the following line in `init.rc` under `_${MY_ANDROID}/device/fsl/`:

```
setprop ro.sf.lcd_density <density>
```

### NOTE

- For the i.MX 8M Mini board, the source folder is `_${MY_ANDROID}/device/fsl/imx8m/evk_8mm/init.rc`.
- For i.MX 8M Nano Board, the source folder is `_${MY_ANDROID}/device/fsl/imx8m/evk_8mn/init.rc`.
- For i.MX 8MQuad AIY Board, the source folder is `_${MY_ANDROID}/device/fsl/imx8m/aiy_8mq/init.rc`.
- For the i.MX 8QuadXPlus MEK board, the source folder is `_${MY_ANDROID}/device/fsl/imx8q/mek_8q/init.rc`.

## 8.5 How to enable low-power audio

The "DirectAudioPlayer" application is provided to support audio playback from DirectOutputThread. The source code is in `_${MY_ANDROID}/vendor/nxp-opensource/fsl_imx_demo/DirectAudioPlayer`. After the "vendor.audio.lpa.enable" property is set to 1, low-power audio can be enabled. In this situation, audio can keep playing even if the system enters suspending mode.

By default, the music stream plays from MixedThread. To make stream play from DirectOutputThread, add the `AUDIO_OUTPUT_FLAG_DIRECT` flag to the related tracks. On the Android Application layer, there is no `AUDIO_OUTPUT_FLAG_DIRECT` flag to specify DirectOutputThread explicitly. Instead, use `FLAG_HW_AV_SYNC` when there is "new AudioTrack" in the application. Then the Android audio framework will add `AUDIO_OUTPUT_FLAG_DIRECT` for this track, and this stream will play from DirectOutputThread.

In low-power audio mode, the default audio period time is 1 second, and the whole buffer can hold 60 seconds data. These two parameters can be configured by the `vendor.audio.lpa.period_ms` and `vendor.audio.lpa.hold_second` properties as follows:

```
> setprop vendor.audio.lpa.hold_second 60
> setprop vendor.audio.lpa.period_ms 1000
```

To enable low-power audio, perform the following steps:

1. Flash `boot-imx8mm-m4.img`, `imx8mm_mcu_demo.img`, and `vbmata-imx8mm-m4.img` to support audio playback based on Cortex-M4 FreeRTOS.
2. Add `bootmcu` to `bootcmd` in U-Boot command line, see Section 3.4.2 "Booting with Single MIPI-to-HDMI display and audio playback based on Cortex-M4 FreeRTOS" in the *Android™ Quick Start Guide (AQSUG)*.
3. Run the following command to enable low-power audio mode:

```
> su
> setprop vendor.audio.lpa.enable 1
> pkill audioserver
```

4. Push the .wav audio files to `/sdcard/`. It is better to use a long duration audio file.
5. Disable the following system sounds:

```
Settings -> Sound -> Touch sounds
Settings -> Sound -> Screen locking sounds
Settings -> Sound -> Charging sounds
```

6. Open the DirectAudioPlayer application, and select a file from the spinner. The file selected is listed under the spinner.
7. Click the **Play** button to play audio.
8. Press the ON/OFF button on the board. The system then enters suspend mode, and the audio can keep playing.

#### NOTE

- Only the i.MX 8M Mini EVK board supports this feature. The audio is output from the "LPA output" port on the audio expansion board. See Figure "i.MX 8M Mini EVK with audio board" in the *Android™ Quick Start Guide (AQSUG)*.
- DirectAudioPlayer supports limited audio files, which is declared in device's audio\_policy\_configuration.xml with AUDIO\_OUTPUT\_FLAG\_DIRECT|AUDIO\_OUTPUT\_FLAG\_HW\_AV\_SYNC flag. Other medias are not supported. For example, it does not support playing 44100Hz audio.
- DirectAudioPlayer supports 24/32 bits wav file with sampling rates no more than 192000.

## 8.6 How to enable USB 2.0 in U-Boot for i.MX 8QuadXPlus

There are both USB 2.0 and USB 3.0 ports on i.MX 8QuadXPlus MEK board. Because U-Boot can support only one USB gadget driver, the USB 3.0 port is enabled by default. To use the USB 2.0 port, modify the configurations to enable it and disable the USB 3.0 gadget driver.

For i.MX 8QuadXPlus, make the following changes under `${MY_ANDROID}/vendor/nxp-opensource/uboot-imx`:

```
diff --git a/configs/imx8qxp_mek_android_defconfig b/configs/imx8qxp_mek_android_defconfig
index ee02e02..e4bbace 100644
--- a/configs/imx8qxp_mek_android_defconfig
+++ b/configs/imx8qxp_mek_android_defconfig
@@ -33,14 +33,14 @@ CONFIG_USB_TCPC=y

CONFIG_CMD_USB_MASS_STORAGE=y
CONFIG_USB_GADGET=y
-# CONFIG_CI_UDC=y
+CONFIG_CI_UDC=y
CONFIG_USB_GADGET_DOWNLOAD=y
CONFIG_USB_GADGET_MANUFACTURER="FSL"
CONFIG_USB_GADGET_VENDOR_NUM=0x18d1
CONFIG_USB_GADGET_PRODUCT_NUM=0x0d02

-CONFIG_USB_CDNS3=y
-CONFIG_USB_CDNS3_GADGET=y
CONFIG_USB_GADGET_DUALSPEED=y

CONFIG_CMD_GPIO=y
diff --git a/include/configs/imx8qxp_mek_android.h b/include/configs/imx8qxp_mek_android.h
index 55f2e15..39022ae 100644
--- a/include/configs/imx8qxp_mek_android.h
+++ b/include/configs/imx8qxp_mek_android.h
@@ -35,7 +35,7 @@
#define CONFIG_FASTBOOT_FLASH

#define CONFIG_FSL_FASTBOOT
-#define CONFIG_FASTBOOT_USB_DEV 1
+#define CONFIG_FASTBOOT_USB_DEV 0
#define CONFIG_ANDROID_RECOVERY
```

To enable USB 2.0 for U-Boot used by UUU, for c language header files, apply the same changes above. For defconfig files, apply the changes above on `imx8qxp_mek_android_uuu_defconfig`. The defconfig file is specially for U-Boot used by UUU.

## 8.7 How to accelerate high resolution video playback through DPU

By default, video output framework is composited to display through the GPU's OpenGL ES API. The GPU's OpenGL ES API has high performance on UI graphics composition, but not the video output from i.MX 8QuadXPlus VPU output. To achieve the best performance of video playback, take the following methods to accelerate the video playback through i.MX 8QuadXPlus DPU.

- Enable it by the default device configuration:

```
device/fsl$ git diff
diff --git a/imx8q/mek_8q/init.rc b/imx8q/mek_8q/init.rc
index 3d6373c..5e1a80f 100644
--- a/imx8q/mek_8q/init.rc
+++ b/imx8q/mek_8q/init.rc
@@ -51,8 +51,8 @@ on early-boot

    # Enable Tethering in the Settings
    setprop ro.tether.denied false
-
-   setprop sys.hwc.disable      1
+   setprop media.amphion_vpu.enable-tile 1
+   setprop sys.hwc.disable      0
    setprop vendor.2d.composition 0
    setprop hwc.stretch.filter 1
```

- Enable it at runtime:

Set the following property in the command line after the Android platform boots up.

```
setprop media.amphion_vpu.enable-tile 1
setprop sys.hwc.disable 0
```

Then, kill `android.hardware.graphics.allocator@2.0-service` and `android.hardware.graphics.composer@2.1-service` process to trigger the property set taking effect.

### NOTE

With this configuration VPU outputs tile format that breaks Android CTS requirement.

## 8.8 How to change SCFW

SCFW is a binary stored in `/${MY_ANDROID}/vendor/nxp/fsl-proprietary/uboot-firmware`, built into bootloader. To change SCFW, you need SCFW porting kit and specified board configuration file. SCFW porting kit contains prebuilt binaries and libraries.

Specified board configuration file is stored in SCFW porting kit, for example (i.MX 8QuadXPlus): `imx-scfw-porting-kit/src/scfw_export_mx8qx_b0/platform/board/mx8qx_mek/board.c`.

There is another board configuration file stored in `/${MY_ANDROID}/vendor/nxp/fsl-proprietary/uboot-firmware/imx8q/board-imx8qxp.c`.

You can copy `board.c` from `vendor/nxp/fsl-proprietary` to the SCFW porting kit. Modify it and then build the SCFW.

The following are steps to build Android SCFW (taking i.MX 8QuadXPlus as example):

1. Download the GCC tool from: <https://developer.arm.com/tools-and-software/open-source-software/developer-tools/gnu-toolchain/gnu-rm/downloads>, and choose the "6-2017-q2-update" version, as this release is validated with it.
2. Unzip the GCC tool to `/opt/scfw_gcc`.
3. Export `TOOLS="/opt/scfw-gcc"`.

- Download SCFW porting kit to `${MY_ANDROID}` as `imx-scfw-porting-kit.bin`. You can download the corresponding version SCFW from here: [L4.14.98\\_2.0.1\\_SCFWKIT-1.2.2](#).
- Unzip the porting kit and SCFW for i.MX 8QuadXPlus.

```
./imx-scfw-porting-kit.bin
cd imx-scfw-porting-kit/src
tar xf scfw_export_mx8qx_b0.tar.gz
```

- Copy THE board configuration file from `${MY_ANDROID}/vendor/nxp/fsl-proprietary/u-boot-firmware/imx8q/board-imx8qxp.c` to porting kit.

```
cp ${MY_ANDROID}/vendor/nxp/fsl-proprietary/u-boot-firmware/imx8q/board-imx8qxp.c
scfw_export_mx8qx_b0/platform/board/mx8qx_mek/board.c
```

- Build SCFW.

```
cd ${MY_ANDROID}/imx-scfw-porting-kit/src/scfw_export_mx8qx_b0
make clean
make qx R=B0 B=mek
```

- Copy the SCFW binary to the u-boot-firmware folder.

```
cp build_mx8qx_b0/scfw_tcm.bin ${MY_ANDROID}/vendor/nxp/fsl-proprietary/u-boot-firmware/
imx8q/mx8qx-scfw-tcm.bin
```

- Build the bootloader.

```
cd ${MY_ANDROID}
make bootloader
```

## 8.9 Trusty OS build and configuration

### 8.9.1 How to fetch and build the Trusty OS

i.MX Android Automotive Pie uses the Trusty OS firmware as TEE that supports security features. Users can modify the Trusty OS code to support different configurations and features.

In this release, the i.MX Trusty OS is based on AOSP Trusty OS. NXP adds the i.MX 8M Quad AIY Board, i.MX 8M Mini EVK Board, and i.MX 8M Nano EVK Board support on it.

To fetch and build the target Trusty OS binary, use the following commands:

```
$repo init -u https://source.codeaurora.org/external/imx/imx-manifest.git -b imx-android-pie
-m imx-trusty-p9.0.0_2.3.0.xml
$repo sync
$source trusty/vendor/google/aosp/scripts/envsetup.sh
$make imx8mm #i.MX 8M Mini EVK Board
$cp ${TRUSTY_REPO_ROOT}/build-imx8mm/lk.bin ${MY_ANDROID}/vendor/nxp/fsl-proprietary/u-boot-
firmware/imx8m/tee-imx8mm.bin
```

Then build the images and flash the u-boot-imx8mm-trusty.imx file to the target device.

#### NOTE

- For i.MX 8M Quad, replace "imx8mm" to "imx8m" in the commands above.
- For i.MX 8M Nano, it uses the same lk.bin build for i.MX 8M Mini.
- `${TRUSTY_REPO_ROOT}` is the root directory of the Trusty OS repository.
- `${MY_ANDROID}` is the root directory of the Android Automotive Pie repository.

## 8.9.2 How to initialize the secure storage for the Trusty OS

Security storage is based on RPMB on the eMMC chip. By default, the RPMB key is not initialized by images.

You can use both the specified RPMB key or random RPMB key. The RPMB key cannot be changed once it is set.

- To set a specified RPMB key, perform the following operations:  
Make your board enter fastboot mode. Execute the commands on the host side:

```
fastboot stage <path-to-your-rpmb-key>
fastboot oem set-rpmb-key
```

After the board is reboot, the RPMB service in Trusty OS is initialized successfully.

### NOTE

- The RPMB key should start with magic "RPMB" and be followed with 32 bytes hexadecimal key.
- A prebuilt `rpmb_key_test.bin` with the fixed key of 32 bytes hexadecimal 0x00 is provided. It is generated with the following shell commands:

```
touch rpmb_key.bin
echo -n "RPMB" > rpmb_key.bin
echo -n -e
'\x00' >> rpmb_key.bin
```

The '\xHH' means 8-bit character whose value is the hexadecimal value 'HH'. You can replace above "00" with the key you want to set.

- To set a random RPMB key, perform the following operations:  
Make your board enter fastboot mode. Execute the commands on the host side:

```
fastboot oem set-rpmb-random-key
```


After the board is reboot, the RPMB service in Trusty OS is initialized successfully.

### NOTE

The random key is generated on the device and is invisible to anyone. The device may no longer boot up if the RPMB key message is destroyed.

## 8.10 AVB key provision

The AVB key consists of a pair of public and private keys. The private key is used by the host to sign the vbmeta image. The public key is used by AVB to authenticate the vbmeta image. The relationships between the private key, the public key, and the vbmeta are as follows:

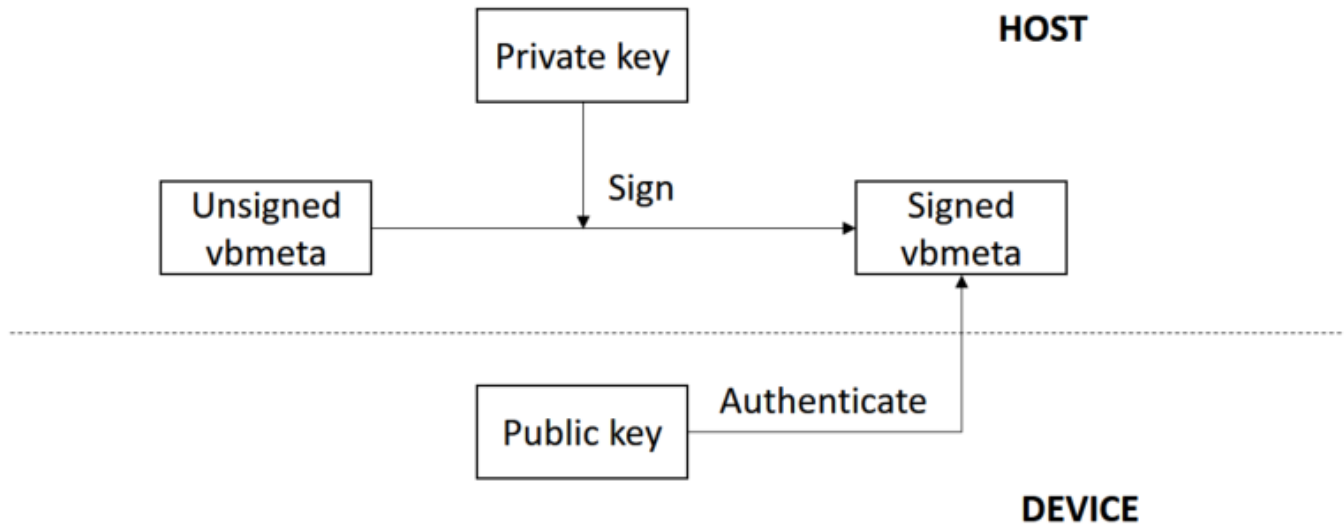

**Figure 1. Relationship between AVB key and vbmeta**

### 8.10.1 How to specify the AVB key

The OpenSSL provides some commands to generate the private key. For example, you can use the following commands to generate the RSA-4096 private key `test_rsa4096_private.pem`:

```
openssl genpkey -algorithm RSA -pkeyopt rsa_keygen_bits:4096 -outform PEM -out
test_rsa4096_private.pem
```

The public key can be extracted from the private key. The `avbtool` in `/${MY_ANDROID}/external/avb` supports such commands. You can get the public key `test_rsa4096_public.bin` with the following commands:

```
avbtool extract_public_key --key test_rsa4096_private.pem --output test_rsa4096_public.bin
```

By default, the Android build system uses the algorithm `SHA256_RSA4096` with the private key from `/${MY_ANDROID}/external/avb/test/data/testkey_rsa4096.pem`. This can be overridden by setting the `BOARD_AVB_ALGORITHM` and `BOARD_AVB_KEY_PATH` to use different algorithm and private key:

```
BOARD_AVB_ALGORITHM := <algorithm-type>
BOARD_AVB_KEY_PATH := <key-path>
```

Algorithm `SHA256_RSA4096` is recommended since Cryptographic Acceleration and Assurance Module (CAAM) can help accelerate the hash calculation.

The Android build system signs the `vbmeta` image with the private key above and stores one copy of the public key in the signed `vbmeta` image. During AVB verification, U-Boot validates the public key first and then uses the public key to authenticate the signed `vbmeta` image.

### 8.10.2 How to set the vbmeta public key

The public key should be stored in Trusty OS backed RPMB for Android Auto. Perform the following steps to set the public key.

Make your board enter fastboot mode, and enter the following commands on the host side:

## Revision History

```
fastboot stage ${your-key-directory}/test_rsa4096_public.bin
fastboot oem set-public-key
```

The public key `test_rsa4096_public.bin` should be extracted from the specified private key. If no private key is specified, set the public key as prebuilt `testkey_public_rsa4096.bin`, which is extracted from the default private key `testkey_rsa4096.pem`.

## 8.11 Key attestation

The keystore key attestation aims to provide a way to strongly determine if an asymmetric key pair is hardware-backed, what the properties of the key are, and what constraints are applied to its usage.

Google provides the attestation "keybox", which contains private keys (RSA and ECDSA) and the corresponding certificate chains to partners from the Android Partner Front End (APFE). After retrieving the "keybox" from Google, you need to parse the "keybox" and provision the keys and certificates to secure storage. Both keys and certificates should be Distinguished Encoding Rules (DER) encoded.

Fastboot commands are provided to provision the attestation keys and certificates. Make sure the secure storage is properly initialized for Trusty OS:

- Set RSA private key:

```
fastboot stage <path-to-rsa-private-key>
fastboot oem set-rsa-atte-key
```

- Set ECDSA private key:

```
fastboot stage <path-to-ecdsa-private-key>
fastboot oem set-ec-atte-key
```

- Append RSA certificate chain:

```
fastboot stage <path-to-rsa-atte-cert>
fastboot oem append-rsa-atte-cert
```

### NOTE

This command may need to be executed multiple times to append the whole certificate chain.

- Append ECDSA certificate chain:

```
fastboot stage <path-to-ecdsa-cert>
fastboot oem append-ec-atte-cert
```

### NOTE

This command may need to be executed multiple times to append the whole certificate chain.

After provisioning all the keys and certificates, the keystore attestation feature should work properly.

## 9 Revision History

Table 24. Revision history

| Revision number   | Date    | Substantive changes |
|-------------------|---------|---------------------|
| P9.0.0_1.0.0-beta | 11/2018 | Initial release     |

*Table continues on the next page...*



**Table 24. Revision history (continued)**

| <b>Revision number</b> | <b>Date</b> | <b>Substantive changes</b>                                                   |
|------------------------|-------------|------------------------------------------------------------------------------|
| P9.0.0_1.0.0-ga        | 01/2019     | i.MX 8M, i.MX 8QuadMax, and i.MX 8QuadXPlus GA release.                      |
| P9.0.0_2.0.0-ga        | 04/2019     | i.MX 8M, i.MX 8QuadMax, and i.MX 8QuadXPlus GA release.                      |
| P9.0.0_2.3.0           | 08/2019     | i.MX 8M Mini, i.MX 8M Quad, i.MX 8M Nano, and i.MX 8QuadXPlus Alpha release. |

**How to Reach Us:****Home Page:**[nxp.com](http://nxp.com)**Web Support:**[nxp.com/support](http://nxp.com/support)

Information in this document is provided solely to enable system and software implementers to use NXP products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits based on the information in this document. NXP reserves the right to make changes without further notice to any products herein.

NXP makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does NXP assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in NXP data sheets and/or specifications can and do vary in different applications, and actual performance may vary over time. All operating parameters, including "typicals," must be validated for each customer application by customer's technical experts. NXP does not convey any license under its patent rights nor the rights of others. NXP sells products pursuant to standard terms and conditions of sale, which can be found at the following address: [nxp.com/SalesTermsandConditions](http://nxp.com/SalesTermsandConditions).

While NXP has implemented advanced security features, all products may be subject to unidentified vulnerabilities. Customers are responsible for the design and operation of their applications and products to reduce the effect of these vulnerabilities on customer's applications and products, and NXP accepts no liability for any vulnerability that is discovered. Customers should implement appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP, the NXP logo, NXP SECURE CONNECTIONS FOR A SMARTER WORLD, COOLFLUX, EMBRACE, GREENCHIP, HITAG, I2C BUS, ICODE, JCOP, LIFE VIBES, MIFARE, MIFARE CLASSIC, MIFARE DESFire, MIFARE PLUS, MIFARE FLEX, MANTIS, MIFARE ULTRALIGHT, MIFARE4MOBILE, MIGLO, NTAG, ROADLINK, SMARTLX, SMARTMX, STARPLUG, TOPFET, TRENCHMOS, UCODE, Freescale, the Freescale logo, AltiVec, C-5, CodeTEST, CodeWarrior, ColdFire, ColdFire+, C-Ware, the Energy Efficient Solutions logo, Kinetis, Layerscape, MagniV, mobileGT, PEG, PowerQUICC, Processor Expert, QorIQ, QorIQ Qonverge, Ready Play, SafeAssure, the SafeAssure logo, StarCore, Symphony, VortiQa, Vybrid, Airfast, BeeKit, BeeStack, CoreNet, Flexis, MXC, Platform in a Package, QUICC Engine, SMARTMOS, Tower, TurboLink, and UMEMS are trademarks of NXP B.V. All other product or service names are the property of their respective owners. AMBA, Arm, Arm7, Arm7TDMI, Arm9, Arm11, Artisan, big.LITTLE, Cordio, CoreLink, CoreSight, Cortex, DesignStart, DynamIQ, Jazelle, Keil, Mali, Mbed, Mbed Enabled, NEON, POP, RealView, SecurCore, Socrates, Thumb, TrustZone, ULINK, ULINK2, ULINK-ME, ULINK-PLUS, ULINKpro,  $\mu$ Vision, Versatile are trademarks or registered trademarks of Arm Limited (or its subsidiaries) in the US and/or elsewhere. The related technology may be protected by any or all of patents, copyrights, designs and trade secrets. All rights reserved. Oracle and Java are registered trademarks of Oracle and/or its affiliates. The Power Architecture and Power.org word marks and the Power and Power.org logos and related marks are trademarks and service marks licensed by Power.org.

© 2019 NXP B.V.

Document Number AUG  
Revision P9.0.0\_2.3.0, 08/2019

