



32-bit Microcontrollers

Kinetis K8x MCU Family

Scalable Memory Expansion, Enhanced Security and Flexible IO Capabilities

Overview

The Kinetis K8x MCU family extends the Kinetis MCU portfolio with advanced security capabilities including:

- Boot ROM to support encrypted firmware updates
- Automatic decryption and execution from external NOR flash memory
- Hardware AES acceleration with side band attack protection
- Support for public key cryptography

These advancements are done while maintaining a high level of compatibility with previous Kinetis devices. K8x MCUs are performance efficient and offer industry-leading low power while providing significant BOM savings through smart on-chip integration. The Kinetis K series is supported by a comprehensive set of development tools, software and enablement.


Kinetis K8x MCUs offer symmetric crypto acceleration as a standard feature along with full-speed USB 2.0 On-The-Go (OTG), including options for crystal-less device functionality. The initial K8x MCUs range in total flash space up to 256KB and have 256KB of SRAM. In addition to the embedded memory resources, the integrated QuadSPI interface supports connections to non-volatile memory (serial NOR), allowing developers to expand beyond the boundaries of a traditional MCU. With the extended memory resources and new security features, developers can safely and quickly enhance their embedded applications with greater capability.

The K8x MCU family offers the security, scalability, and flexibility to address the challenges of creating smart devices for the internet of tomorrow.

Target Applications

- Building control
- Home automation and security
- IoT data concentrators
- Point-of-sale
- Portable healthcare
- Smart energy gateways
- Wearables

Kinetis K8x MCU Family Block Diagram

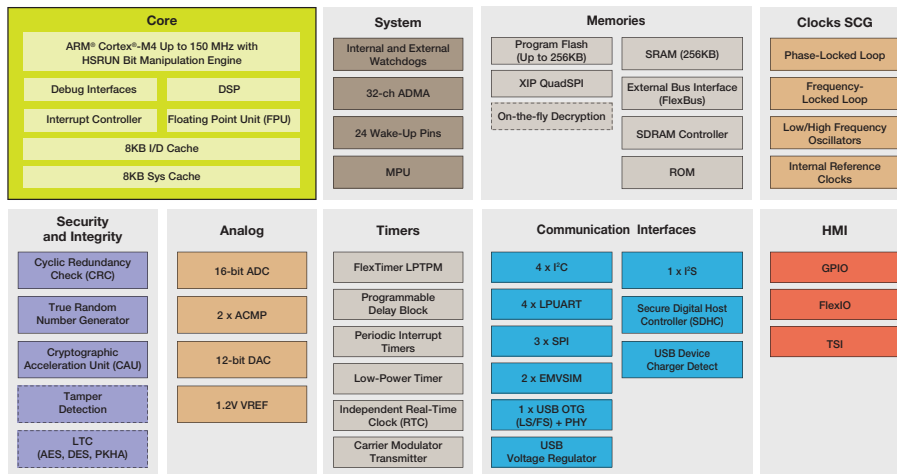

Optional

Comprehensive Enablement Solutions

Kinetis Software Development Kit (SDK)

- Extensive suite of robust peripheral drivers, stacks and middleware, with new support for symmetric and asymmetric cryptographic acceleration
- Includes software examples demonstrating the usage of the HAL, peripheral drivers, middleware and RTOSes
- Operating system abstraction (OSA) for Freescale MQX™ RTOS, FreeRTOS, and Micrium uC/OS kernels and baremetal (no RTOS) applications

Processor Expert Software Configuration Tool

- Complimentary software configuration tool providing IO allocation and pin initialization and configuration of hardware abstraction and peripheral drivers

Integrated Development Environments (IDE)

- Atollic® TrueSTUDIO®
- Green Hill® Software MULTI
- IAR Embedded Workbench®
- ARM Keil® Microcontroller Development Kit
- Kinetis Design Studio IDE
 - No-cost integrated development environment (IDE) for Kinetis MCUs
 - Eclipse and GCC-based IDE for C/C++ editing, compiling and debugging
- Broad ARM ecosystem support through Freescale Connect partners

Online enablement with ARM mbed™ development platform

- Rapid and easy Kinetis MCU prototyping and development
- Online mbed SDK, Developer Community
- Free software libraries

Freescale MQX™ RTOS

- Commercial-grade MCU software platform at no cost with optional add-on software and support packages

Kinetis K8x MCUs: Advanced Security Architecture Key Features*

	Features	Benefit	Feature Details
K80	Encrypted firmware updates boot ROM	Secure firmware update with built in ROM routines to reduce software overhead and complexity	Firmware is encrypted by an AES128 bit key. Fully supports internal flash security, including ability to mass erase or unlock security via the backdoor key. Multiple options for executing the bootloader either at system start-up or under application control at runtime. The ability to configure the QuadSPI interface is based on a configuration block located in the external QuadSPI.
	Flash access control (FAC) configurable memory protection scheme designed to allow end users to utilize software libraries while offering programmable restrictions to these libraries	Protection of software IP	Non-volatile control registers to set access privileges of on chip flash resources. Supervisor or execute only access can be set for up to 64 different segments.
	Hardware and software mechanisms for acceleration of symmetric cryptography and hashing functions	Reduces CPU loading for cryptographic functions. Facilitates detection of data tampering. Simplifies the implementation of higher level security functions and network security standards. For firmware updates, hashing of firmware can be used with encryption keys to ensure that the firmware that is being updated is trusted firmware.	Hardware implementation of security operations symmetrical cryptography. Supports DES, 3DES, AES, MD5, SHA-1 and SHA-256 algorithms.
K82	Cryptographic co-processor for AES, DES and public key cryptography	Offload CPU and reduced software footprint. Acceleration for RSA2048, ECDSA and ECDH reduces the latency for authentication.	
	On-the-fly AES decryption from external serial NOR flash	Easily secure off-chip firmware	Hardware module supporting AES128 counter mode decryptions on external flash data fetched by the QuadSPI.
K81	Tamper detect module with up to 8 tamper pins	Reduce external circuits needed to support anti-tamper mechanisms	Secure key storage space with asynchronous erasure when external tamper events occur. Tamper detection for pin, temperature, voltage and clock, as well as active tamper.
	Secure Session RAM	Memory scratch pad for secure functions	RAM memory block designed for storage of sensitive information (such as encryption session keys) which is automatically cleared in the event of the detection of a tamper event.


*For a full list of Kinetis MCU security features please visit: Freescale.com/Security.

Bootloader

- Common bootloader for all Kinetis MCUs
- In-system flash programming over a serial connection: erase, program, verify
- ROM-based bootloader with open source software and host-side programming utilities.

Development Hardware

- Tower System modular development platform
 - Rapid prototyping and evaluation
 - Low cost, interchangeable modules
- Freescale Freedom development platforms
 - Low cost (<\$40 USD)
 - Arduino R3 compatible
 - mbed-enabled on select boards



- TWR-K80F150M, FRDM-K82F, TWR-PoS-K81 will be available for order in the fourth quarter of 2015.

Kinetis K8x MCU Benefits

- Up to 150 MHz Cortex-M4 core supporting a broad range of processing bandwidth requirements while maintaining excellent cost-effectiveness, easy-to-use packages along with memory scalability options including SD/eMMC, SDRAM and Serial NOR flash memories
- 8KB I/D and 8KB system cache to reduce latency of internal and external memory resources reducing power consumption and improving performance

For more information about Kinetis MCUs, software, tools and documentation, please visit freescale.com/Kinetis

Freescale, the Freescale logo, Kinetis, Processor Expert, MQX and Tower are trademarks of Freescale Semiconductor, Inc., Reg. U.S. Pat. & Tm. Off. All other product or service names are the property of their respective owners. ARM, Cortex and Keil are registered trademarks of ARM Limited (or its subsidiaries) in the EU and/or elsewhere. mbed is a trademark of ARM Limited (or its subsidiaries) in the EU and/or elsewhere. All rights reserved. ©2015 Freescale Semiconductor, Inc.

Document Number: KNTSK8XFS REV 0

