

UUU (Universal Update Utility)

REVISION HISTORY

NUMBER	DATE	DESCRIPTION	NAME
5589368	Fri Nov 9 14:26:13 2018 -0600	point into win7 user guide	nxfpfrankli
a20e88b	Fri Nov 9 15:25:57 2018 -0600	fix path seperate	Frank Li
0bd57ab	Mon Nov 12 14:06:00 2018 -0600	Updated FAQ (asciidoc)	nxfpfrankli
0714490	Tue Nov 27 11:56:13 2018 -0600	Updated Release Notes (asciidoc)	nxfpfrankli
652d52e	Tue Nov 27 13:12:23 2018 -0600	Updated Release Notes (asciidoc)	nxfpfrankli
24c4981	Tue Nov 27 15:00:34 2018 -0600	Updated Release Notes (asciidoc)	nxfpfrankli
9cadcf8	Thu Nov 29 15:14:51 2018 -0600	Updated Home (asciidoc)	nxfpfrankli
9be1d88	Thu Nov 29 15:17:41 2018 -0600	Updated Home (asciidoc)	nxfpfrankli
a9b6498	Thu Nov 29 15:27:05 2018 -0600	Updated Home (asciidoc)	nxfpfrankli
a6b7ebd	Fri Nov 30 11:30:23 2018 -0600	Updated Release Notes (asciidoc)	nxfpfrankli
379a768	Tue Dec 4 11:34:37 2018 -0600	Updated Home (asciidoc)	nxfpfrankli
06a61b6	Tue Dec 4 11:35:31 2018 -0600	Updated Home (asciidoc)	nxfpfrankli
e2d3abe	Tue Dec 4 11:38:06 2018 -0600	Updated FAQ (asciidoc)	nxfpfrankli
d30423f	Wed Dec 5 15:24:21 2018 -0600	Updated UUU default support protocol list (asciidoc)	nxfpfrankli
a9b70c5	Mon Dec 10 11:01:10 2018 -0600	Updated UUU default support protocol list (asciidoc)	nxfpfrankli
fcab0ed	Thu Dec 13 10:16:55 2018 -0600	Updated Release Notes (asciidoc)	nxfpfrankli
bae1d6c	Fri Jan 11 14:08:18 2019 -0600	Updated UUU default support protocol list (asciidoc)	nxfpfrankli

REVISION HISTORY

NUMBER	DATE	DESCRIPTION	NAME
f0416ac	Wed Jan 16 14:19:54 2019 -0600	Updated _Sidebar (markdown)	nxpfrankli
409e541	Thu Jan 17 14:22:54 2019 -0600	Updated Release Notes (asciidoc)	nxpfrankli
a9d6248	Wed Jan 23 07:56:16 2019 -0600	Updated Example (asciidoc)	nxpfrankli
5e4197c	Wed Jan 23 10:46:52 2019 -0600	Updated Sample script (asciidoc)	nxpfrankli
5b90577	Wed Jan 23 10:49:14 2019 -0600	Updated Example (asciidoc)	nxpfrankli
4a45ce8	Wed Jan 23 10:50:36 2019 -0600	Updated Example (asciidoc)	nxpfrankli
f9e9970	Fri Jan 25 13:28:05 2019 -0600	Updated Release Notes (asciidoc)	nxpfrankli
776df7a	Mon Feb 25 11:33:44 2019 -0600	Updated Release Notes (asciidoc)	nxpfrankli

Contents

1	Introduction	1
1.1	Running environment	1
1.2	Typical Usage	1
1.3	Typical Script	2
1.4	License	2
1.5	What Firmware Need	2
1.6	Setup auto parameter complete	3
1.6.1	windows	3
1.6.2	linux	3
1.7	L4.9.123_2.3.0_8MM GA	3
2	Syntactic	3
3	Usage Example	5
3.1	Basic	5
3.1.1	Download boot loader for imx6\imx7	5
3.1.2	Download boot loader for imx8qxp	5
3.1.3	Download SPL and uboot, such as imx8mq.	6
3.1.4	Burn Android Image to eMMC	6
3.1.5	Burn yocto Image to eMMC	6
3.2	Built-in script	6
3.3	multi boards support	6
3.3.1	For the same boards	6
3.3.2	For the difference boards	6
3.4	Talk with fastboot	7
3.4.1	boot linux kernel	7
3.4.2	write image to emmc	7
4	Sample scripts	7
5	Supported protocol	7
5.1	SDP: i.MX6/7 ROM download protocol	8
5.1.1	Supported command:	8
5.2	SDPU\SDPV: uboot implement simplified ROM SDP protocol	8
5.3	SDPS: i.MX8QXP and i.MX8QM ROM download protocol	8
5.4	FB: Android fastboot protocol	8
5.4.1	Support command:	9
5.5	FBK: Android fastboot protocol, implement at initramfs. See project imx-uuu	9
5.5.1	Support command:	9
5.6	Common command for all protocol	9

6	Migration from mfgtool ucl2.xml	10
7	Win 7 User Guide	11
7.1	Back Ground	12
7.2	Install updated winusb inf file	12
7.3	Use zadig to install winusb driver	13
8	FAQ	13
9	Build Steps	15
9.1	windows	15
9.2	linux	16
10	Uboot config requirement	16
11	kernel config requirement	17
12	Release Notes	17
12.1	1.2.TBD (Next)	17
12.1.1	New features	17
12.1.2	Bug fixes	18
12.2	1.2.0	18
12.2.1	New features	18
12.2.2	Bug fixes	18
12.3	1.1.81	18
12.3.1	New features	18
12.3.2	Bug fixes	19
12.4	1.1.41	19
12.4.1	New features	19
12.4.2	Bug fixes	19
13	Known issue	19

1 Introduction

Welcome to the UUU (Universal Update Utility). This is an evolution of MFGTools (aka MFGTools v3).

UUU is Freescale/NXP i.MX Chip image deploy tools.

With the time, the need for an update utility portable to Linux and Windows increased. UUU have the same usage on both Windows and Linux. It means the same script works on both OS.

UUU is **command line tools**. look like

```
uuu (universal update utility) for nxp imx chips -- libuuu-1.0.1-gffd9837
```

```
Succues:0          Failure:3          Wait for Known USB Device Appear...

1:11      5/5 [          ] SDP: jump -f u-boot-dtb.imx - ↵
  ivtinitramf....
2:1       1/5 [===>    ] SDP: boot -f u-boot-imx7dsabresd_sd. ↵
  imx ....
```

UUU design as common library and UI. So user can easily integrate into their tools with uuu library. UUU also easy run in any scripts.

[PDF](#) of wiki content also is available at release page.

1.1 Running environment

- Windows 10, 64bit, early version(below 1.2.0) need install [vs2017 redistribute package](#)
- Ubuntu 16.14 or above, 64bit

Windows 7 user please read [WIN7-User-Guide](#)

1.2 Typical Usage

Set board boot pin to serial download mode. Generally iMX ROM will fail back to usb serial download mode if boot failure.

Download uboot

```
uuu bootloader
```

Burn uboot into emmc

```
uuu -b emmc bootloader
```

Burn rootfs image into emmc

```
uuu -b emmc_all bootloader rootfs.sdcard
```

Decompress rootfs image and burn into emmc (since 1.1.87)

```
uuu -b emmc_all bootloader rootfs.sdcard.bz2/*
```

Notes: bootloader means bootable image, which included ROM required header. for imx6/7, it should be uboot.imx generally. for imx8qxp\imx8qm\imx8mm\im8mq, it is flash.bin.

Burn release image into emmc

```
uuu I4.9.123_2.3.0_8mm-ga.zip
```

Note: some release combine multi board into one zip package, you need use uuu release.zip/uuu.auto-<boardname>

More usage please refer [Example](#)

1.3 Typical Script

uuu's script is plain text file

**first line must be

```
uuu_version 1.0.1
```

Version show minimize version of uuu to run this script.

Then flow uuu commands.

UUU command format as

PROTOCOL: CMD

The below is example to boot uboot for imx6 and imx7.

```
uuu_version 1.0.1
SDP: dcd -f u-boot.imx
SDP: write -f u-boot.imx -ivt 0
SDP: jump -f u-boot.imx -ivt 0
```

more sample scripts see [Sample-script](#)

The below table environment may be used when write uuu script

Table 1: Table Fastboot environment

Variable	Description
fastboot_dev	fastboot flash device, support mmc and sata
fastboot_buffer	fastboot download buffer address
fastboot_bytes	fastboot download file size
emmc_dev	eMMC device number
sd_dev	sd slot device number

1.4 License

uuu is licensed under the BSD license. See LICENSE. The BSD licensed prebuilt Windows binary version of uuu is statically linked with the LGPL libusb library, which remains LGPL.

- bzip2 (BSD license) is from <https://github.com/enthought/bzip2-1.0.6>
- zlib (zlib license) is from <https://github.com/madler/zlib.git>
- libusb (LGPL-2.1) is from <https://github.com/libusb/libusb.git>

1.5 What Firmware Need

What you want	Firmware Need
Download bootloader	N/A
Burn Image to eMMC/SD	uboot with fastboot enable
Burn Image to qspi\spi\nor	uboot with fastboot enable
Burn Image into Nand flash	uboot(1), linux kernel\initramfs\uboot\dtb
Need linux shell cmd such as fdisk	uboot(1), linux kernel\initramfs\uboot\dtb
Boot linux kenrel with rootfs already in eMMC	uboot with fastboot enable
Boot Linux kernel with nfs over USB	uboot with fastboot enable, initramfs

(1) prefer enable fastboot. If ROM HID support write additional image to DDR place, you can write kernel\dtb\initramfs to ddr before jump to uboot. Enable fastboot give more flexibility to change kernel command line.

1.6 Setup auto parameter complete

1.6.1 windows

Just power shell support customized auto complete

Powershell: Enjoy auto [tab] command complete by run below command or put into Documents\WindowsPowerShell\Microsoft.PowerShell

```
Register-ArgumentCompleter -CommandName uuu -ScriptBlock {param($commandName, ←
    $parameterName, $wordToComplete, $commandAst, $fakeBoundParameter); C:\Users\ ←
    nxa23210\uuu\uuu\x64\Release\lib\uuu.exe -autocomplete $parameterName }
```

1.6.2 linux

Enjoy auto [tab] command complete by put below script into /etc/bash_completion.d/uuu

```
_uuu_autocomplete()
{
    COMPREPLY=( $(/home/lizhi/source/mfgtools/uuu/uuu $1 $2 $3) )
}
complete -o nospace -F _uuu_autocomplete uuu
```

1.7 L4.9.123_2.3.0_8MM GA

It is first official BSP release to support uuu For L4.9.123_2.3.0_8MM GA with i.MX8M Mini, see [?]

2 Syntactic

uuu (Universal Update Utility) for nxp imx chips -- libuuu_1.1.87-7-gad2ec1f

uuu [-d -m -v -V] <bootloader|cmdlists|cmd>

```
bootloader  download bootloader to board by usb
cmdlist     run all commands in cmdlist file
             If it is path, search uuu.auto in dir
             If it is zip, search uuu.auto in zip
cmd         Run one command, use -H see detail
             example: SDPS: boot -f flash.bin
-d         Deamon mode, wait for forever.
-v -V      verbose mode, -V enable libusb error\warning info
-m         USBPATH Only monitor these pathes.
             -m 1:2 -m 1:3
```

uuu -s Enter shell mode. uuu.inputlog record all input commands
you can use "uuu uuu.inputlog" next time to run all commands

uuu -h -H show help, -H means detail helps

uuu [-d -m -v] -b[run] <emmc|emmc_all|qspi|sd|sd_all|spl> arg...
Run Built-in scripts


```

emmc      burn boot loader to eMMC boot partition
          arg0: _flash.bin
emmc_all  burn whole image to eMMC
          arg0: _flash.bin
          arg1: _rootfs.sdcard
qspi      burn boot loader to qspi nor flash
          arg0: _flexspi.bin bootloader
          arg1: _image[Optional] image burn to flexspi, default is the same as bootloader
sd        burn boot loader to sd card
          arg0: _flash.bin
sd_all    burn whole image to sd card
          arg0: _flash.bin
          arg1: _rootfs.sdcard
spl       boot spl and uboot
          arg0: _flash.bin

```

```

uuu -bshow <emmc|emmc_all|qspi|sd|sd_all|spl>
      Show built-in script

```

Command Format PROTOCOL COMMAND ARG

PROTOCOL

ALL protocol supported common command

```

done          #last command for whole flow
delay <ms>    # delay ms
sh\shell <any shell command> #Run shell command, such as wget to file from network
<            <any shell command> #use shell command's output as uuu command
this command generally used for burn some sequence number, such as production id, mac address
for example:
              FB:< echo ucmd print

```

CFG: Config protocol of specific usb device vid/pid

```

SDPS|SDP|FB\Fastboot|FBK -chip <chip name> -pid <pid> -vid <vid> [-bcdversion <ver>]

```

SDPS: Stream download after MX8QXPB0

```

boot -f <filename> [-offset 0x0000]

```

SDP: iMX6/iMX7 HID download protocol.

```

dcd -f <filename>
write -f <filename> [-addr 0x000000] [-ivt 0]
jump -f <filename> [-ivt 0]
boot -f <filename> [-nojump]

```

FB[-t timeout]:\Fastboot: android fastboot protocol. unit of timeout is ms

```

getvar
ucmd <any uboot command>
acmd <any never returned uboot command, like booti, reboot>
flash [-raw2sparse] <partition> <filename>
download -f <filename>

```

```

FBK: community with kernel with fastboot protocol. DO NOT compatible ←
      with fastboot tools.
ucmd <any kernel command> and wait for command finish
acmd <any kernel command> don't wait for command finish
sync                               wait for acmd processs finish.
ucp <source> <destinate>          copy file from/to target
      T:<filename> means target board ←
      file.
      T:- means copy data to target's ←
      stdio pipe.
      copy image T:/root/image ;downl ←
      oad ←
      image to path /root/image
      copy T:/root/image image ;uploa ←
      d / ←
      root/image to file image.

Example for transfer big file
acmd tar -                          ; run tar background and ge ←
      t data from stdio
ucp rootfs.tar.gz T:- ; send to target stdio pipe
sync                               ; wait for tar process exit ←
      .

```

For example:

```

SDPS: boot -f <filename>
SDP:  boot -f <filename>
CFG: SDP: -chip imx6ull -pid 0x1234 -vid 0x5678

SDP: boot -f u-boot-imx7dsabresd_sd.imx -nojump
SDP: write -f zImage -addr 0x80800000
SDP: write -f zImage-imx7d-sdb.dtb -addr 0x83000000
SDP: write -f fsl-image-mfgtool-initramfs-imx_mfgtools.cpio.gz.u-boot -addr 0x ←
      83800000
SDP: jump -f u-boot-dtb.imx -iv

```

3 Usage Example

3.1 Basic

3.1.1 Download boot loader for imx6\imx7

```
uuu uboot.imx
```

3.1.2 Download boot loader for imx8qxp

```
uuu flash.bin
```


3.4 Talk with fastboot

3.4.1 boot linux kernel

```
uuu FB: ucmd setenv fastboot_buffer ${loadaddr}
uuu FB: download -f Image
uuu FB: ucmd setenv fastboot_buffer ${fdt_addr}
uuu FB: download -f imx8qxp_mek.dtb
uuu FB: acmd booti ${loadaddr} - ${fdt_addr}
```

Extended environment for fastboot

```
fastboot_buffer      Image download address
fastboot_bytes      reflect previous download image byte size
```

3.4.2 write image to emmc

```
uuu FB: flash -raw2sparse all <image file>
```

4 Sample scripts

5 Supported protocol

UUU is scripted base multi protocol system.

Built in config:

Pctl	Chip	Vid	Pid	BcdVersion
SDPS:	MX8QXP	0x1fc9	0x012f	[0x0002..0xffff]
SDPS:	MX8QM	0x1fc9	0x0129	[0x0002..0xffff]
SDP:	MX7D	0x15a2	0x0076	
SDP:	MX6Q	0x15a2	0x0054	
SDP:	MX6D	0x15a2	0x0061	
SDP:	MX6SL	0x15a2	0x0063	
SDP:	MX6SX	0x15a2	0x0071	
SDP:	MX6UL	0x15a2	0x007d	
SDP:	MX6ULL	0x15a2	0x0080	
SDP:	MX6SLL	0x1fc9	0x0128	
SDP:	MX7ULP	0x1fc9	0x0126	
SDP:	MXRT106X	0x1fc9	0x0135	
SDP:	MX8MM	0x1fc9	0x0134	
SDP:	MX8MQ	0x1fc9	0x012b	
SDPU:	SPL	0x0525	0xb4a4	[0x0000..0x04ff]
SDPV:	SPL1	0x0525	0xb4a4	[0x0500..0xffff]
FBK:		0x066f	0x9afe	
FBK:		0x066f	0x9bff	
FB:		0x0525	0xa4a5	
FB:		0x18d1	0x0d02	

Table 2: Table UUU Protocol to USB lower level Map

UUU Protocol	USB Low level transfer
SDP	HID i.MX6/7, i.MX8 MM, i.MX8M
SDPU\SDPV	HID uboot implement of SDP, SPL download uboot
SDPS	HID i.MX8QXP i.MX8QM
FB	winusb (windows), raw transfer by libusb
FBK	winusb (windows), raw transfer by libusb

5.1 SDP: i.MX6/7 ROM download protocol

5.1.1 Supported command:

Run DCD from image with ivt header

```
dcd -f <filename>
```

write image to address.

```
write -f <filename> [-addr 0x000000] [-ivt 0]
```

ivt 0 means write to the address, which ivt pointer

jump to image with ivt header

```
jump -f <filename> [-ivt 0]
```

boot image, include (dcd, write and jump three commands)

```
boot -f <filename> [-nojump]
```

5.2 SDPU\SDPV: uboot implement simplified ROM SDP protocol

Uboot implemented i.MX 6/7 ROM SDP protocol. The support command the same as SDP.

SDPV is upgrade version of SDPU, which support -skipspl option for write command

See below for uboot requirement [uboot-config-requirement](#)

5.3 SDPS: i.MX8QXP and i.MX8QM ROM download protocol

send image by sdp command.

```
boot -f <filename> [-offset 0x0000]
```

5.4 FB: Android fastboot protocol

refer [fast boot protocol](#)

See below for [uboot requirement](#)

5.4.1 Support command:

```
getvar
ucmd <any uboot command>
acmd <any never returned uboot command, like booti, reboot>

# partition "all" means whole device.
flash [-raw2sparse] <partition> <filename>
download -f <filename>
```

****Some Uboot command need long time to finish. Default FB timeout is 2s. You can use below method to change timeout value**

```
# time out set to 10000ms
FB[-t 10000]: ucmd <any uboot command>
```

Table 3: Table Fastboot environment

Variable	Description
fastboot_dev	fastboot flash device, support mmc and sata
fastboot_buffer	fastboot download buffer address
fastboot_bytes	fastboot download file size
emmc_dev	eMMC device number
sd_dev	sd slot device number

5.5 FBK: Android fastboot protocol, implement at initramfs. See project imx-uuu

5.5.1 Support command:

```
ucmd <any kernel command> and wait for command finish
acmd <any kernel command> don't wait for command finish
sync                               wait for acmlid processs finish.
ucp <source> <destinate>          copy file from/to target
                                   T:<filename> means target board file.
                                   T:- means copy data to target's stdio pipe.
                                   copy image T:/root/image ;download image to path /root/ ↵
                                   image
                                   copy T:/root/image image ;upload /root/image to file ↵
                                   image.....
```

Example for transfer big file

```
acmd tar -                        ; run tar background and get data from stdio
ucp rootfs.tar.gz T:-             ; send to target stdio pipe
sync                               ; wait for tar process exit.
```

Linux environment:

Each command in separate process so environment can not be affect next command. Use below method to workaround this problem.

```
FBK: ucmd source /tmp/mtd.sh; flash_erase /dev/mtd${nandrootfs} 0 0
```

5.6 Common command for all protocol

Table 4: Table Common command for all protocol

Command	Description
Done	last command for finish whole flow.
Delay	Busy wait for millisecond
SH/SHELL	run external command
<	stdout as command, such as "< echo ucmd print", which generally used for burn serial number

6 Migration from mfgtool ucl2.xml

**Most case user can use uboot fastboot protocol to finish image program work.

In case you have to load kernel to burn whole image.

The below simple map ucl2.xml to uuu script.

ucl2.xml	uuu
<CMD state="BootStrap" type="boot" body="BootStrap" file="firmware/flash.bin" ifdev="MX8QXPB0">Loading boot image</CMD>	SDPS: boot -f flash.bin
<CMD state="BootStrap" type="boot" body="BootStrap" file="firmware/flash.bin" ifdev="MX8QXPB0">Loading boot image</CMD>	SDPS: boot -f flash.bin
<CMD state="BootStrap" type="boot" body="BootStrap" file="firmware/flash.bin" ifdev="MX8MM">Loading U-boot</CMD>	SDP: boot -f flash.bin SDP: boot -f flash.bin SDPU: write -f flash.bin -offset 0x57c00 SDPU: jump
<CMD state="BootStrap" type="load" file="firmware/Image" address="0x80280000" loadSection="OTH" setSection="OTH" HasFlashHeader="FALSE" ifdev="MX8QXP MX8QM">Loading Kernel.</CMD>	FB: ucmd download -f Image
<CMD state="BootStrap" type="load" file="firmware/initramfs.cpio.gz.uboot" address="0x83800000" loadSection="OTH" setSection="OTH" HasFlashHeader="FALSE" ifdev="MX8QM MX8QXP">Loading Initramfs.</CMD>	FB: ucmd download -f initramfs.cpio.gz.uboot
<CMD state="BootStrap" type="load" file="firmware/fsl-imx8qxp.dtb" address="0x83000000" loadSection="OTH" setSection="OTH" HasFlashHeader="FALSE" ifdev="MX8QXP">Loading device tree.</CMD>	FB: ucmd download -f fsl-imx8qxp.dtb
<CMD state="BootStrap" type="jump" > Jumping to OS image. </CMD>	
<!-- create partition --> <CMD state="Updater" type="push" body="send" file="mksdcard.sh.tar">Sending partition shell</CMD>	FBK: ucp mksdcard.sh.tar t:/tmp
<CMD state="Updater" type="push" body="\$ tar xf \$FILE "> Partitioning... </CMD>	FBK: ucmd tar xf /tmp/mksdcard.sh.tar -d /tmp
<CMD state="Updater" type="push" body="\$ sh mksdcard.sh /dev/mmcblk%mmc%"> Partitioning... </CMD>	FBK: ucmd mksdcard.sh /dev/mmcblk0mmc
<!-- burn uboot --> <CMD state="Updater" type="push" body="send" file="files/imx-boot-imx8qxp-sd.bin" ifdev="MX8QXPB0">Sending u-boot.bin</CMD>	FBK: ucp imx-boot-imx8qxp-sd.bin t:/tmp

<CMD state="Updater" type="push" body="\$ dd if=/dev/zero of=/dev/mmcblk0 bs=1k seek=4096 conv=fsync count=8">clear u-boot arg</CMD>	FBK: ucmd dd if=/dev/zero of=/dev/mmcblk0 bs=1k seek=4096 conv=fsync count=8
<CMD state="Updater" type="push" body="\$ dd if=\$FILE of=/dev/mmcblk0 bs=1k seek=33 conv=fsync ifdev="MX8QM MX8QXP MX8MQ">write u-boot.bin to sd card</CMD>	FBK: ucmd dd if=/tmp/imx-boot-imx8qxp-sd.bin of=/dev/mmcblk0 bs=1k seek=33 conv=fsync
<CMD state="Updater" type="push" body="\$ while [! -e /dev/mmcblk0p1]; do sleep 1; echo waiting. . . ; done ">Waiting for the partition ready</CMD>	FBK: ucmd while [! -e /dev/mmcblk%mmc%p1]; do sleep 1; echo waiting. . . ; done
<CMD state="Updater" type="push" body="\$ mkfs.vfat /dev/mmcblk0p1">Formatting rootfs partition</CMD>	FBK: ucmd mkfs.vfat /dev/mmcblk0p1
<CMD state="Updater" type="push" body="\$ mkdir -p /mnt/mmcblk0p1"/>	FBK: ucmd mkdir -p /mnt/mmcblk0p1
<CMD state="Updater" type="push" body="\$ mount -t vfat /dev/mmcblk0p1 /mnt/mmcblk0p1"/>	FBK: ucmd vfat /dev/mmcblk0p1 /mnt/mmcblk0p1
<!-- burn zImage --> <CMD state="Updater" type="push" body="send" file="files/Image">Sending kernel</CMD>	FBK: ucp Image t:/tmp
<CMD state="Updater" type="push" body="\$ cp \$FILE /mnt/mmcblk0p1/Image">write kernel image to sd card</CMD>	FBK: ucmd /tmp/Image /mnt/mmcblk0p1/Image
<!-- burn dtb --> <CMD state="Updater" type="push" body="send" file="files/fsl-imx8qxp.dtb" ifdev="MX8QXP MX8QXPB0">Sending Device Tree file</CMD>	FBK: ucp fsl-imx8qxp.dtb /tmp
<CMD state="Updater" type="push" body="\$ cp \$FILE /mnt/mmcblk0p1/fsl-imx8qm.dtb" ifdev="MX8QM">write device tree to sd card</CMD>	FBK: ucmd cp /tmp/fsl-imx8qxp.dtb /mnt/mmcblk0p1/
<CMD state="Updater" type="push" body="\$ umount /mnt/mmcblk0p1">Unmounting vfat partition</CMD>	FBK: ucmd umount /mnt/mmcblk0p1
<!-- burn rootfs --> <CMD state="Updater" type="push" body="\$ mkfs.ext3 -F -j /dev/mmcblk0p2">Formatting rootfs partition</CMD>	FBK: ucmd mkfs.ext3 -F -j /dev/mmcblk0p2
<!-- burn rootfs --> <CMD state="Updater" type="push" body="\$ mkfs.ext3 -F -j /dev/mmcblk0p2">Formatting rootfs partition</CMD>	FBK: ucmd mkfs.ext3 -F -j /dev/mmcblk0p2
<CMD state="Updater" type="push" body="\$ mkdir -p /mnt/mmcblk0p2"/>	FBK: ucmd mkdir -p /mnt/mmcblk0p2
<CMD state="Updater" type="push" body="\$ mount -t ext3 /dev/mmcblk0p2 /mnt/mmcblk0p2"/>	FBK: ucmd mount -t ext3 /dev/mmcblk0p2 /mnt/mmcblk0p2
<CMD state="Updater" type="push" body="pipe tar -jxv -C /mnt/mmcblk0p2" file="files/rootfs.tar.bz2">Sending and writing rootfs</CMD>	FBK: acmd tar -jxv -C /mnt/mmcblk0p2 FBK: ucp rootfs.tar.bz2 t:-
<CMD state="Updater" type="push" body="frf">Finishing rootfs write</CMD>	FBK: sync
<CMD state="Updater" type="push" body="\$ umount /mnt/mmcblk0p2">Unmounting rootfs partition</CMD>	FBK: ucmd umount /mnt/mmcblk0p2
<CMD state="Updater" type="push" body="\$ echo Update Complete!">Done</CMD>	done

7 Win 7 User Guide

Win7 user may face some additional one time setup work because original win7 missed a updated .inf file


7.1 Back Ground

Win7 ships with correct *winusb.sys* file. but is missing an updated *.inf* that associates with "usb\ms_comp_winusb" devices. Normally if the USB device supports Microsoft OS descriptors, then it will allow Windows to automatically install the WinUSB driver. This mechanism is supported "in-box" for Win8 and newer. For Win7 the mechanism is supported through Windows update. Depending on the update policy for the Win7 machine, the appropriate driver may or may not be already available on the machine. If it is not already on the machine, user can use the following manual procedure to install the driver if necessary. (copy from https://www.silabs.com/community/interface/knowledge-base.entry.html/2017/02/06/manually_installwin-A2Jj)

Some windows update also included updated *.inf* file. You can try run uuu to see what happen. If windows report "can't install driver", that means your system missed such update file.

7.2 Install updated winusb inf file

- [Download package](#)
- unzip
- run install.bat as administrator permission.

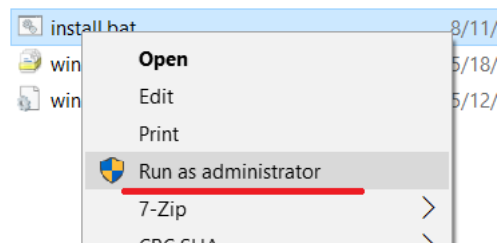

- The below screen show install success

```
C:\Windows\System32\cmd.exe
C:\Windows\system32>echo off
Administrative permission confirmed
===
Microsoft PnP Utility

Processing inf :          winusbcompat.inf
Driver package added successfully.
Published name :          oem8.inf

Total attempted:          1
Number successfully imported: 1


"SUCCESS: WINUSB WCID install"
Hit enter to close_
```

Notes:

4.9.123 8MM GA and 4.14 beta release missed a patch. Please apply below [patch](#) in uboot

7.3 Use zadig to install winusb driver

If still fail install winusb driver you can try below method. you can try download zadig from <https://zadig.akeo.ie/>
Choose **USB download device** and click install.

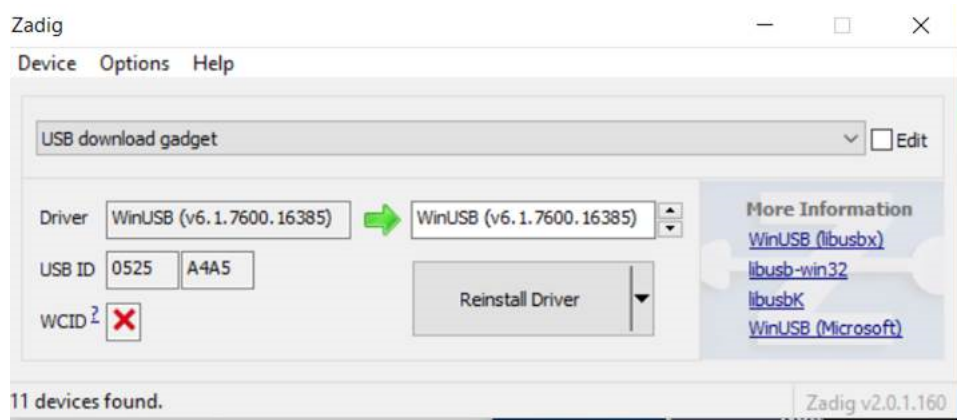

If you already apply patch and still see WCID is red "x", please submit issue.

8 FAQ

- **Win7 can't found driver**

- Need install winusb driver, you can use <https://zadig.akeo.ie/> to install winusb driver
- see page [WIN7-User-Guide](#)

- **Linux: Open device failure**

```
sudo uuu xxx
```

- **Some iMX8mm(845) chip failure write at linux system**

Need apply ROM patch, contact FAE to get it.

- **How to use absolute path in scripts**

Default all paths in script is related uuu scripts. if you want to use absolute path in scripts ↔

Add ">" in path like

```
>/home/xxx
```

- **uuu exit silence or report missed dll**

Please upgrade to 1.2.x

- **How to avoid sudo in linux**

Put below context into /etc/udev/rules.d/99-uuu.rules (need sudo)

```

SUBSYSTEM=="usb", ATTRS{idVendor}=="1fc9", ATTRS{idProduct}=="012f", MODE="0666"
SUBSYSTEM=="usb", ATTRS{idVendor}=="1fc9", ATTRS{idProduct}=="0129", MODE="0666"
SUBSYSTEM=="usb", ATTRS{idVendor}=="15a2", ATTRS{idProduct}=="0076", MODE="0666"
SUBSYSTEM=="usb", ATTRS{idVendor}=="15a2", ATTRS{idProduct}=="0054", MODE="0666"
SUBSYSTEM=="usb", ATTRS{idVendor}=="15a2", ATTRS{idProduct}=="0061", MODE="0666"
SUBSYSTEM=="usb", ATTRS{idVendor}=="15a2", ATTRS{idProduct}=="0063", MODE="0666"
SUBSYSTEM=="usb", ATTRS{idVendor}=="15a2", ATTRS{idProduct}=="0071", MODE="0666"
SUBSYSTEM=="usb", ATTRS{idVendor}=="15a2", ATTRS{idProduct}=="007d", MODE="0666"
SUBSYSTEM=="usb", ATTRS{idVendor}=="15a2", ATTRS{idProduct}=="0080", MODE="0666"
SUBSYSTEM=="usb", ATTRS{idVendor}=="1fc9", ATTRS{idProduct}=="0128", MODE="0666"
SUBSYSTEM=="usb", ATTRS{idVendor}=="1fc9", ATTRS{idProduct}=="0126", MODE="0666"
SUBSYSTEM=="usb", ATTRS{idVendor}=="1fc9", ATTRS{idProduct}=="0135", MODE="0666"
SUBSYSTEM=="usb", ATTRS{idVendor}=="1fc9", ATTRS{idProduct}=="0134", MODE="0666"
SUBSYSTEM=="usb", ATTRS{idVendor}=="1fc9", ATTRS{idProduct}=="012b", MODE="0666"
SUBSYSTEM=="usb", ATTRS{idVendor}=="0525", ATTRS{idProduct}=="b4a4", MODE="0666"
SUBSYSTEM=="usb", ATTRS{idVendor}=="0525", ATTRS{idProduct}=="a4a5", MODE="0666"
SUBSYSTEM=="usb", ATTRS{idVendor}=="066F", ATTRS{idProduct}=="9BFF", MODE="0666"

```

run `sudo udevadm control --reload-rules`

`uuu -udev` can show above help.

- **How to get file in zip without decompress**

Assume there are file name `uuu.auto` in `A.zip` file.

```
A.zip/uuu.auto
```

for example:

```
uuu A.zip/uuu.auto
```

- **How to send out uncompress bz2**

Added `/*` after `bz2` file

for example

```
uuu -b emmc_all <bootloader> sdcard.bz2/*
```

- **Boot fail after burn > 4G Image**

uboot need below patch

```

diff --git a/common/image-sparse.c b/common/image-sparse.c
index ddf5772..86ff5a0 100644
--- a/common/image-sparse.c
+++ b/common/image-sparse.c
@@ -59,7 +59,7 @@ void write_sparse_image(
     uint32_t bytes_written = 0;
     unsigned int chunk;
     unsigned int offset;
-    unsigned int chunk_data_sz;
+    uint64_t chunk_data_sz;

```

```

        uint32_t *fill_buf = NULL;
        uint32_t fill_val;
        sparse_header_t *sparse_header;
@@ -130,7 +130,7 @@ void write_sparse_image(
                                sizeof(chunk_header_t));
        }

-         chunk_data_sz = sparse_header->blk_sz * chunk_header-> ←
chunk_sz;
+         chunk_data_sz = (uint64_t)sparse_header->blk_sz * (uint64_t) ←
chunk_header->chunk_sz;
        blkcnt = chunk_data_sz / info->blksz;
        switch (chunk_header->chunk_type) {
        case CHUNK_TYPE_RAW:

```

• WCID failure load

Apply below uboot patch

```

diff --git a/drivers/usb/gadget/f_fastboot.c b/drivers/usb/gadget/f_fastboot.c
index ae8fe80..cd46ca4 100644
--- a/drivers/usb/gadget/f_fastboot.c
+++ b/drivers/usb/gadget/f_fastboot.c
@@ -2543,10 +2543,10 @@ static int fastboot_bind(struct usb_configuration *c, ←
struct usb_function *f)
        f->os_desc_table->if_id = id;
        INIT_LIST_HEAD(&fb_os_desc.ext_prop);
        fb_ext_prop.name_len = strlen(fb_ext_prop.name) * 2 + 2;
-       fb_os_desc.ext_prop_len = 14 + fb_ext_prop.name_len;
+       fb_os_desc.ext_prop_len = 10 + fb_ext_prop.name_len;
        fb_os_desc.ext_prop_count = 1;
-       fb_ext_prop.data_len = strlen(fb_ext_prop.data);
-       fb_os_desc.ext_prop_len += fb_ext_prop.data_len;
+       fb_ext_prop.data_len = strlen(fb_ext_prop.data) * 2 + 2;
+       fb_os_desc.ext_prop_len += fb_ext_prop.data_len + 4;
        list_add_tail(&fb_ext_prop.entry, &fb_os_desc.ext_prop);

        id = usb_string_id(c->cdev);

```

9 Build Steps

9.1 windows

- download visual studio 2017 community version (free)
- git clone <https://github.com/NXPmicro/mfgtools.git>
- cd mfgtools
- git submodule init
- git submodule update
- open msvs/uuu.sln by vs2017
- click build

9.2 linux

- git clone <https://github.com/NXPmicro/mfgtools.git>
- cd mfgtools
- sudo apt-get install libusb-1.0.0-dev libzip-dev libbz2-dev
- cmake .
- make

10 Uboot config requirement

To talk with uuu, uboot need enable fastboot. fastboot need auto run when detect boot from USB.

```

CONFIG_CMD_FASTBOOT=y
CONFIG_USB_FUNCTION_FASTBOOT=y
CONFIG_USB_GADGET=y
CONFIG_USB_GADGET_DOWNLOAD=y
CONFIG_USB_GADGET_MANUFACTURER="FSL"
CONFIG_USB_GADGET_VENDOR_NUM=0x0525
CONFIG_USB_GADGET_PRODUCT_NUM=0xa4a5
CONFIG_CI_UDC=y # UDC need change according system, ↔
    some system use CONFIG_USB_DWC3, some use CONFIG_USB_CDNS3
CONFIG_FSL_FASTBOOT=y
CONFIG_FASTBOOT=y
CONFIG_FASTBOOT_BUF_ADDR=0x83800000 # Address need change according ↔
    system, generally it can be the same as ${LOADADDR}
CONFIG_FASTBOOT_BUF_SIZE=0x40000000
CONFIG_FASTBOOT_FLASH=y
CONFIG_FASTBOOT_FLASH_MMC_DEV=1
CONFIG_EFI_PARTITION=y
CONFIG_ANDROID_BOOT_IMAGE=y

```

If use SPL, SDP need be enabled.

```

CONFIG_SPL_USB_HOST_SUPPORT=y
CONFIG_SPL_USB_GADGET_SUPPORT=y
CONFIG_SPL_USB_SDP_SUPPORT=y
CONFIG_SDP_LOADADDR=0x40400000 # Address need change according ↔
    system, choose free memory

```

uuu related patches.

https://source.codeaurora.org/external/imx/uboot-imx/log/?h=imx_v2017.03_4.9.123_imx8mm_ga

About Fastboot enable:

```

719651a MLK-18257-1 Enable fastboot support in qxp mek board
d5226a3 MLK-18257-2: fix fastboot build warning
219c989 MLK-18257-3 run fastboot if initramfs is in validate
09b1876 MLK-18257-4 use another method check if need run bootcmd_mfg
3b1fa9d MLK-18257-5 enhance fastboot uboot cmd
ca96e0b MLK-18406 fastboot support all partition

```

About uboot SDP enable:

```

192a26d MLK-18707-1: SDP: use CONFIG_SDP_LOADADDR as default load address
9764fb2 MLK-18707-2 iMX8M enable fastboot as default
db9a634 MLK-18862 imx8mm uuu can write emmc by fastboot

```

Additional environment need be define

Table 5: Table uuu environment

Variable	Usage	Description
emmc_dev	emmc burn	eMMC device number
sd_dev	burn sd	sd slot device number
kboot	boot kernel\burn nand	kernel boot command, it is booti for arm64, bootz for arm32
weim_uboot	burn weim nor	uboot burn to position of weim nor
weim_base	burn weim nor	weim base address
mtdparts	burn nand	NAND flash partition configuration, such as "mtdparts=8000000.nor:1m(boot),-(rootfs)\;gpmi-nand:64m(nandboot),16m(nandkernel),16m(nandrootfs)"
spi_bus	burn spi (not qspi\fspi)	spi nor flash bus number
spi_uboot	burn spi (not qspi\fspi)	spi nor flash uboot offset

11 kernel config requirement

Some kernel config required

- USB CONFIG FS need be built-in
- One of UDC driver and PHY need be built-in
- Funfunction FS need be enabled

```

Device Drivers
  USB support
    USB gadget support (very last entry)
      USB Gadget Drivers (...)
        USB functions configurable through configfs
          Mass storage
          Function filesystem (functionFS)

```

12 Release Notes

12.1 1.2.TBD (Next)

12.1.1 New features

- Auto parameter complete support

- Add option `-udev` to help create udev rule to avoid use `sudo`
- Remove VT color at win7
- Fail back to verbose mode at win7
- Enable uboot shell mode
- Just print help when run `uuu`
- Added `blog` command to fetch message from uboot boot log
- Support file path include space. need add `"` at file path
- Windows version built-in `libusb`
- New SDPV support to support `-skipsql` for uboot, which support auto scan uboot position.

12.1.2 Bug fixes

- Fixed `uuu "fb[-t 1000]:" ucmd` wait forever problem
- Fixed missed `sdpu`: done at `spl` built in script
- Fixed show nothing when wait for usb connection
- Fixed random claim interface failure at windows platform
- Fixed random crash when multi-device download at windows platform
- Fixed memory leak.
- Fixed #79 file all zero when `ucp` from target to host
- Fixed crash when done is not last cmd

12.2 1.2.0

12.2.1 New features

- Support decompress `bz2` file, `sdcard.bz2/*` means decompress it.
- Support enter shell after run script

12.2.2 Bug fixes

- Fix `mx6` boot failure when enable security
- Fix windows version dependent on vs redistribute package

12.3 1.1.81

12.3.1 New features

- Support shell command
 - Support shell command generate dynamic `uuu` command to burn sequence id, like MAC address
 - Reduce cpu usage rate at windows platform by increase each bulk transfer size
 - Added `q(quit)` to exit shell at `-s` mode
-

12.3.2 Bug fixes

- fixed some typo
- fixed build script qspi burn failure if file size > 1M
- fixed file locked by uuu to prevent user update it.
- fixed crash at special uboot size

12.4 1.1.41

12.4.1 New features

- Support SDP protocol (i.MX6x, i.MX7, i.MX8M, i.MX8MM)
- Support SDPS protocol (i.MX8QXP B0, i.MX8QM B0)
- Support SDPU protocol (uboot\SPL implemented SDP protocol)
- Support FB protocol (fastboot with uboot)
- Support FBK protocol (fastboot in kernel, daemon implement at imx-uuc)
- Support multi-device download
- Support built-in script

12.4.2 Bug fixes

- Fix sometime open usb device failure at windows platform.
- Fix protocol case sensitive problem in script
- Fix open zip file failure

13 Known issue

- some old i.MX8MM board HID can't work in linux system. Need apply ROM patch to fix. Please contact FAE.
 - QXP/QM NAND image can't download by UUU because alignment requirement is difference
-